



Austrian Institute of Construction Engineering  
 Schenkenstrasse 4 | T+43 1 533 65 50  
 1010 Vienna | Austria | F+43 1 533 64 23  
 www.oib.or.at | mail@oib.or.at



## European Technical Assessment

**ETA-12/0373**  
of 03.11.2017

General part

**Technical Assessment Body issuing the European Technical Assessment**

Österreichisches Institut für Bautechnik (OIB)  
Austrian Institute of Construction Engineering

**Trade name of the construction product**

Schmid screws RAPID®, STARDRIVE and SP

**Product family to which the construction product belongs**

Screws for use in timber constructions

**Manufacturer**

Schmid Schrauben Hainfeld GmbH  
Landstal 10  
3170 Hainfeld  
Austria

**Manufacturing plants**

Schmid Schrauben Hainfeld GmbH  
Landstal 10  
3170 Hainfeld  
Austria

**This European Technical Assessment contains**

47 pages including 10 Annexes, which form an integral part of this assessment.

**This European Technical Assessment is issued in accordance with Regulation (EU) No 305/2011, on the basis of**

European Assessment Document  
EAD 130118-00-0603 "Screws for use in timber constructions".

**This European Technical Assessment replaces**

European technical approval ETA-12/0373 with validity from 05.11.2012 to 04.11.2017.

## Remarks

Translations of the European Technical Assessment in other languages shall fully correspond to the original issued document and should be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may be made with the written consent of Österreichisches Institut für Bautechnik. Any partial reproduction has to be identified as such.

Specific parts

### 1 Technical description of the product

This European Technical Assessment<sup>1</sup> (ETA) applies to the screws for use in timber constructions "Schmid screws RAPID®, STARDRIVE and SP". Schmid screws RAPID®, STARDRIVE and SP are self-tapping screws divided into a drill tip, optionally a compressor and/or cutting groove, thread, optionally a friction part, shank, and head of the screw. The screws are made from special carbon or stainless steel. The screws from special carbon steel are hardened. They are anti-friction coated and are electrogalvanized and passivated (yellow or blue), provided with a zinc-nickel coating or hot-dip galvanized. The washers are made from carbon steel. Possible outer thread diameters as well as overall lengths for the Schmid screws RAPID®, STARDRIVE and SP are given in Table 1.

The screws and washers correspond to the specifications given from Annex 0 to Annex 6. The material characteristics, dimensions and tolerances of the product not indicated in these Annexes, are given in the technical file<sup>2</sup> of the European Technical Assessment.

**Table 1:** Possible outer thread diameter and overall length of screws

Type of Schmid screws	Outer thread diameter		Overall length	
	min.	max.	min.	max.
	mm	mm	mm	mm
RAPID®	4	12	20	1000
STARDRIVE	4	10	20	500
SP	4	6	20	200

### 2 Specification of the intended use(s) in accordance with the applicable European Assessment Document

#### 2.1 Intended use

The screws are used for connections in load bearing timber structures between wood-based members or between those members and steel members:

- Solid timber of softwood of strength class C14 or better and solid timber of hardwood of strength class D18 or better according to EN 338<sup>3</sup> and EN 14081-1,
- Glued laminated timber and glued solid timber of softwood of strength class GL20 or better according to EN 14080 or glued laminated timber of hardwood according to European Technical Assessments or national provisions that apply on the installation site,
- Laminated veneer lumber LVL according to EN 14374,

<sup>1</sup> The ETA-12/0373 was firstly issued in 2012 as European technical approval with validity from 05.11.2012 and amended and converted in 2017 to the European Technical Assessment ETA-12/0373 of 03.11.2017.

<sup>2</sup> The technical file of the European Technical Assessment is deposited at Österreichisches Institut für Bautechnik.

<sup>3</sup> Reference documents are listed in Annex 10.

- Cross laminated timber according to European Technical Assessments or national provisions that apply on the installation site.

The screws may be used for connecting the following wood-based panels to the timber members mentioned above:

- Laminated veneer lumber LVL according to EN 14374,
- Solid wood panels according to EN 13353 and EN 13986,
- Plywood according to EN 636 and EN 13986,
- Oriented strand boards, OSB, according to EN 300 and EN 13986,
- Particleboards according to EN 312 and EN 13986,
- Fibreboards according to EN 622-2, EN 622-3 and EN 13986,
- Cement-bonded particle boards according EN 634-1 and EN 13986 or European Technical Assessments or national provisions that apply on the installation site.

Compression and tension reinforcement perpendicular to the grain with fully threaded screws as well as shear reinforcement with fully threaded screws with a diameter  $d \geq 8$  mm is allowed.

In addition, screws with  $6 \text{ mm} \leq d \leq 12 \text{ mm}$  may be used for fixing of thermal insulation on rafters and walls.

The product shall be subjected to static and quasi static actions only.

The product is intended to be used in service classes 1, 2 and 3 according to EN 1995-1-1. The scope of the screws regarding resistance to corrosion shall be defined according to national provisions that apply at the installation site considering environmental conditions.

Hot-dip galvanised screws with a minimum thickness of the zinc coating of  $55 \mu\text{m}$  as well as screws made of stainless steel may be used in conditions defined by service class 3. The field of application of the screws made of stainless steel shall be defined according to EN 1993-1-4 or national provisions that apply at the installation site.

## 2.2 General assumptions

The screws for use in timber constructions are manufactured in accordance with the provisions of the European Technical Assessment using the manufacturing process as identified in the inspection of the manufacturing plant by Österreichisches Institut für Bautechnik and laid down in the technical file.

The manufacturer shall ensure that the requirements in accordance with the Clauses 1, 2 and 3 as well as with the Annexes of the European Technical Assessment are made known to those who are concerned with design and execution of the works.

### Design

The European Technical Assessment only applies to the manufacture and use of the screws for use in timber constructions. Verification of stability of the works including application of loads on the products is not subject to the European Technical Assessment.

The following conditions shall be observed:

- Design of Schmid screws RAPID®, STARDRIVE or SP is carried under the responsibility of an engineer experienced in such products.
- Design of the works shall account for the protection of Schmid screws RAPID®, STARDRIVE and SP to maintain service classes 1 and 2 according to EN 1995-1-1 or national provisions that apply on the installation site.
- Schmid screws RAPID®, STARDRIVE or SP are installed correctly.

Design of the screws for use in timber constructions may be according to EN 1995-1-1, taking into account of Annex 6 to Annex 9 of the European Technical Assessment. Hereby, the outer thread diameter  $d$  is used as nominal diameter  $d$  or rather effective diameter  $d_{ef}$  and  $l_{ef}$  is the threaded part in the timber member including point.

Standards and regulations in force at the place of use shall be considered.

#### Packaging, transport, storage, maintenance, replacement and repair

Concerning product packaging, transport, storage, maintenance, replacement and repair it is the responsibility of the manufacturer to undertake the appropriate measures and to advise his clients on the transport, storage, maintenance, replacement and repair of the product as he considers necessary.

#### Installation

It is assumed that the product will be installed according to the manufacturer's instructions or (in absence of such instructions) according to the usual practice of the building professionals.

The screws are either driven into the wood-based member without pre-drilling or in predrilled holes with a diameter not exceeding the inner thread diameter. The screw holes in steel members shall be pre-drilled with an adequate diameter greater than the outer thread diameter.

Screws made of carbon steel with an outer thread diameter  $5 \text{ mm} \leq d \leq 12 \text{ mm}$  may be driven into laminated veneer lumber LVL of beech or related products of hardwood with predrilling; screws with an outer thread diameter  $d = 8 \text{ mm}$  (see Table A6.9) may be driven into laminated veneer lumber LVL of beech or related products of hardwood without predrilling.

At least four screws shall be used in a connection with screws inserted in the timber member with an angle between screw axis and grain direction of less than  $15^\circ$ . The penetration length of the threaded part of the screw shall be at least  $20 d$ .

To ensure a proper installation for screws with lengths of more than 800 mm a guiding hole of  $5 d$  is recommended.

For mounting of steel plates and wood-based panels the screw head must be placed on top of these members.

The structural members which are connected with Schmid screws RAPID®, STARDRIVE or SP shall

- be in accordance with Clause 2.1;
- ensure minimum spacing and edge distances in accordance with EN 1995-1-1 and Annex 7.

### **2.3 Working life/Durability**

The provisions made in the European Technical Assessment (ETA) are based on an assumed intended working life of Schmid screws RAPID®, STARDRIVE and SP of 50 years, when installed in the works, provided that the screws are subject to appropriate installation, use and maintenance (see Clause 2.2). These provisions are based upon the current state of the art and the available knowledge and experience<sup>4</sup>.

The indications given as to the working life of the construction product cannot be interpreted as a guarantee neither given by the product manufacturer or his representative nor by EOTA nor by the Technical Assessment Body, but are regarded only as a means for choosing the appropriate products in relation to the expected economically reasonable working life of the works.

<sup>4</sup> The real working life of a product incorporated in a specific works depends on the environmental conditions to which that works is subject, as well as on the particular conditions of the design, execution, use and maintenance of that works. Therefore, it cannot be excluded that in certain cases the real working life of the product can also be shorter than the assumed working life.

### 3 Performance of the product and reference to the methods used for its assessment

#### 3.1 Essential characteristics of the product

**Table 2: Essential characteristics of the product and product performance**

No	Essential characteristic	Product performance
Basic requirement for construction works 1: Mechanical resistance and stability <sup>1)</sup>		
1	Dimensions	Annex 0 to Annex 5
2	Characteristic yield moment	Annex 6
3	Bending angle	Annex 6
4	Characteristic withdrawal parameter	Annex 6
5	Characteristic head pull-trough parameter	Annex 6
6	Characteristic tensile strength	Annex 6
7	Characteristic yield strength	Annex 6
8	Characteristic torsional strength	Annex 6
9	Insertion moment	Annex 6
10	Spacing, end and edge distances of the screws and minimum thickness of the wood based material	Annex 7, if relevant
11	Slip modulus for mainly axially loaded screws	Annex 6
12	Durability against corrosion	3.1.1
Basic requirement for construction works 2: Safety in case of fire		
13	Reaction to fire	3.1.2
Basic requirement for construction works 4: Safety and accessibility in use		
14	Same as BWR 1	
<sup>1)</sup> These characteristics also relate to basic requirement 4 for construction works.		

##### 3.1.1 Durability against corrosion

The product is intended to be used in service classes 1, 2 and 3 according to EN 1995-1-1.

The screws and washers made from carbon steel are electrogalvanized and yellow or blue passivated, coated with a zinc-nickel coating or hot-dip galvanized. The minimum thickness of the zinc coating of the screws is 5 µm and the minimum thickness of the zinc-nickel coating is 4 µm. The minimum thickness of the zinc coating of hot-dip galvanized screws is 55 µm.

Steel no. 1.4567 or 14578 or equivalent according to EN 10088-1 is used for screws made from stainless steel.

Durability of Schmid screws RAPID®, STARDRIVE and SP is in accordance with EN 1995-1-1 or national provisions that apply on the installation site.

##### 3.1.2 Reaction to fire

Schmid screws RAPID®, STARDRIVE and SP are made from steel classified as Euroclass A1 in accordance with Commission Decision 96/603/EC, as amended by Commission Decision 2000/605/EC.

## 3.2 Assessment methods

### 3.2.1 General

The assessment of the essential characteristics in Clause 3.1 of the screws for use in timber constructions for the intended use, and in relation to the requirements for mechanical resistance and stability, for safety in case of fire and for safety and accessibility in use in the sense of the basic requirements for construction works № 1, 2 and 4 of Regulation (EU) № 305/2011 has been made in accordance with the European Assessment Document EAD 130118-00-0603, "Screws for use in timber constructions".

### 3.2.2 Identification

The European Technical Assessment for the screws for use in timber constructions is issued on the basis of agreed data that identify the assessed product. Changes to materials, to composition, to characteristics of the product, or to the production process could result in these deposited data being incorrect. Österreichisches Institut für Bautechnik should be notified before the changes are implemented, as an amendment of the European Technical Assessment is possibly necessary.

## 4 Assessment and verification of constancy of performance (thereinafter AVCP) system applied, with reference to its legal base

### 4.1 System of assessment and verification of constancy of performance

According to Commission Decision 97/176/EC the system of assessment and verification of constancy of performance to be applied to "Schmid screws RAPID®, STARDRIVE and SP" is System 3. System 3 is detailed in Commission Delegated Regulation (EU) № 568/2014 of 18 February 2014, Annex, 1.4., and provides for the following items

- (a) The manufacturer shall carry out factory production control.
- (b) The notified laboratory shall assess the performance on the basis of testing (based on sampling carried out by the manufacturer), calculation, tabulated values or descriptive documentation of the construction product.

### 4.2 AVCP for construction products for which a European Technical Assessment has been issued

Notified bodies undertaking tasks under System 3 shall consider the European Technical Assessment issued for the construction product in question as the assessment of the performance of that product. Notified bodies shall therefore not undertake the tasks referred to in point 4.1 (b).

## 5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable European Assessment Document

### 5.1 Tasks for the manufacturer

#### 5.1.1 Factory production control

In the manufacturing plant the manufacturer shall establish and continuously maintain a factory production control. All procedures and specifications adopted by the manufacturer shall be documented in a systematic manner. The factory production control shall ensure the constancy of performances of Schmid screws RAPID®, STARDRIVE and SP with regard to the essential characteristics.

The manufacturer shall only use raw materials supplied with the relevant inspection documents as laid down in the control plan. The incoming raw materials shall be subject to controls by the manufacturer before acceptance. Check of incoming materials shall include control of inspection documents presented by the manufacturer of the raw materials.

The frequencies of controls conducted during manufacturing and on the finalised product are defined by taking account of the manufacturing process of the product and are laid down in the control plan.

The results of factory production control are recorded and evaluated. The records include at least the following data:

- Designation of the product, basic materials and components
- Type of control or test
- Date of manufacture of the product and date of testing of the product or basic materials or components
- Results of controls and tests and, if appropriate, comparison with requirements
- Name and signature of person responsible for factory production control

The records shall be kept at least for ten years time after the construction product has been placed on the market. On request they shall be presented to Österreichisches Institut für Bautechnik.

#### 5.1.2 Declaration of performance

The manufacturer is responsible for preparing the declaration of performance. When all the criteria of the assessment and verification of constancy of performance are met, the manufacturer shall issue a declaration of performance.

Issued in Vienna on 03.11.2017  
by Österreichisches Institut für Bautechnik

The original document is signed by:

Rainer Mikulits  
Managing Director

**Table A0.1 Code system for Schmid screws RAPID®, STARDRIVE and SP**

Code	Parameter	Code	Annex
I	Screw diameter	Dimension in 0.1 mm    DDD	0 to 6
II	Length	Dimension in mm    LLL	6
III	Thread length	Dimension in mm    bbb	-
IV	Head	Letters    A to T	1
V	Shank	Number    0 to 2	2
VI	Under head "Unterkopf"	Letters    A to T	1
VII	Compressor	Number    0 to 3	2
VIII	Thread	Letters    A to E	3
IX	Cutting groove	Number    0 or 1	3
X	Point	Letters    A to F	4
XI	Characteristic head pull-through parameter	Number    0	-
	90° head	Number    1	6, Table A6.1
	180° head and washer	Number    2	6, Table A6.2
XII	Other product characteristics	Letters    A to F	6, Table A6.3 to A6.9

*Example:*

*RAPID® 2000 5x70/37*

*Code 050x070/037 A1B 0C1 A1C*

*Screw diameter*

*5 mm*

*Length*

*70 mm*

*Thread length*

*37 mm*

*Head*

*Countersunk head  $d_k=10$  mm, according to Annex 1, Table for head "A"*

*Shank*

*Shank with friction part*

*Under head*

*Cutter ribs according to head B*

*Compressor*

*without compressor*

*Thread*

*Double thread*

*Cutting groove*

*Thread with cutting groove*

*Point*

*Regular point*

*Char. head pull-through parameter*

*according to Annex 6, Table A6.1 (for 90° heads)*

*Other product characteristics*

*according to Annex 6, Table A6.6 (group C)*


**Schmid screws RAPID®, STARDRIVE and SP**



Annex 0

of European Technical Assessment  
 ETA-12/0373 of 03.11.2017

Code system and screw assembly

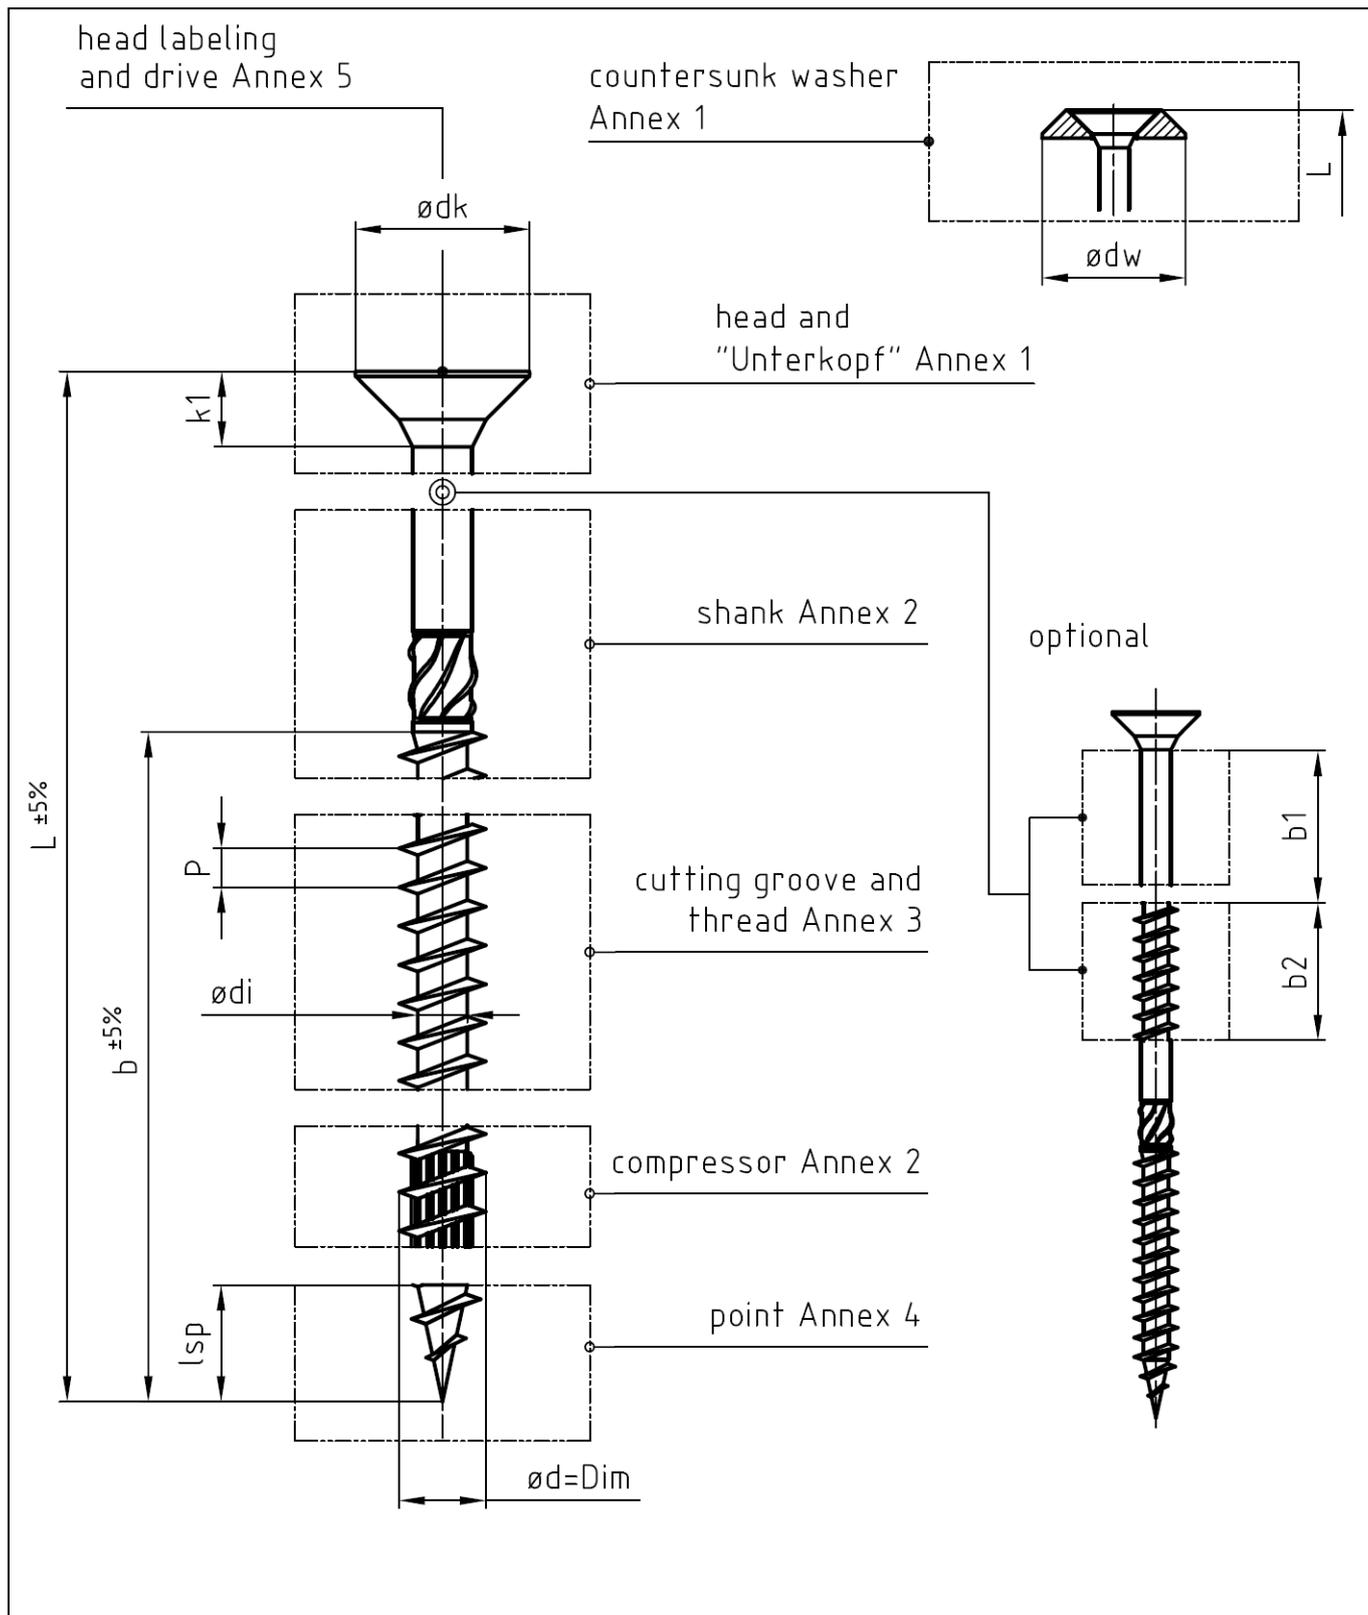

Schmid screws RAPID®, STARDRIVE and SP




Code system and screw assembly

Annex 0


of European Technical Assessment  
 ETA-12/0373 of 03.11.2017




head "H"  
 universal head  
 with thick shaft

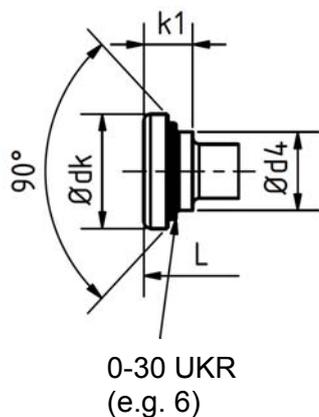


head "J"  
 kombi hexagonal head  
 with thick shaft

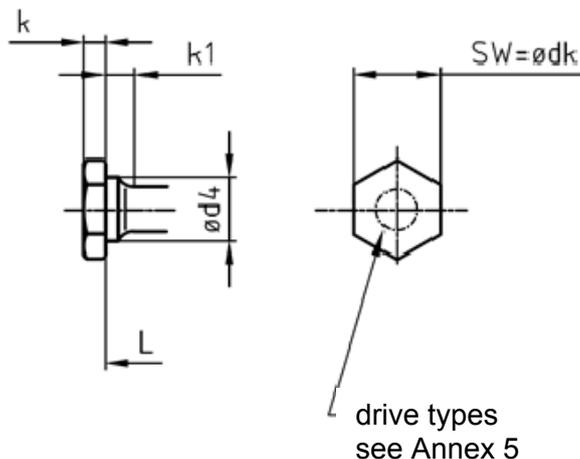


head "K"  
 countersunk head  
 with thick shaft

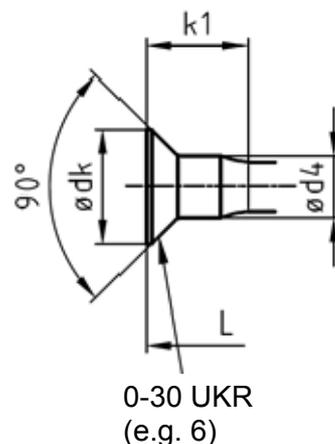


head "L"  
 cylinder head

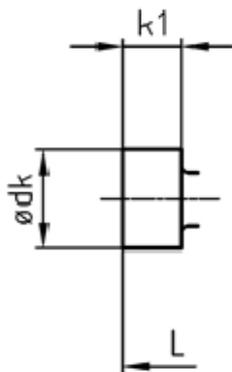

head "M"  
 countersunk washer

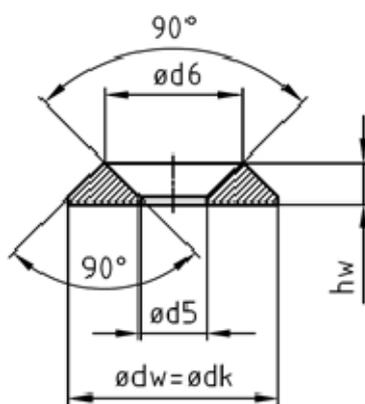

head "N"  
 SuperSenkFix head

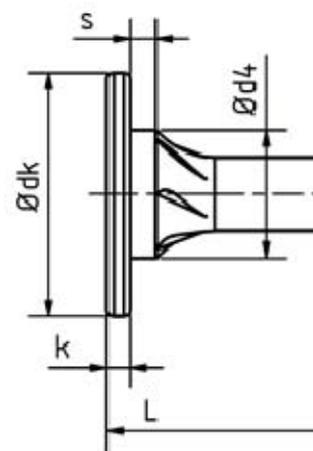





Schmid screws RAPID®, STARDRIVE and SP



Annex 1

of European Technical Assessment  
 ETA-12/0373 of 03.11.2017

Screw head geometry

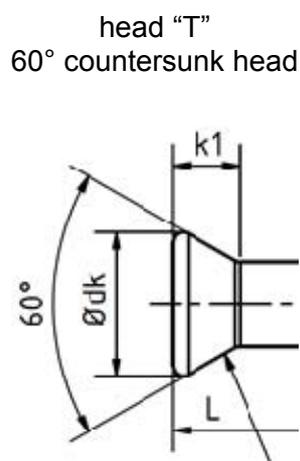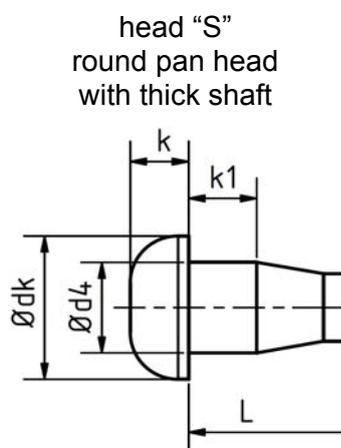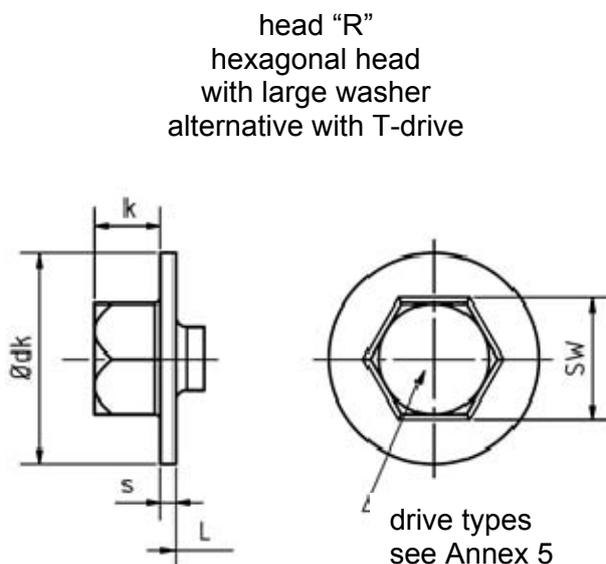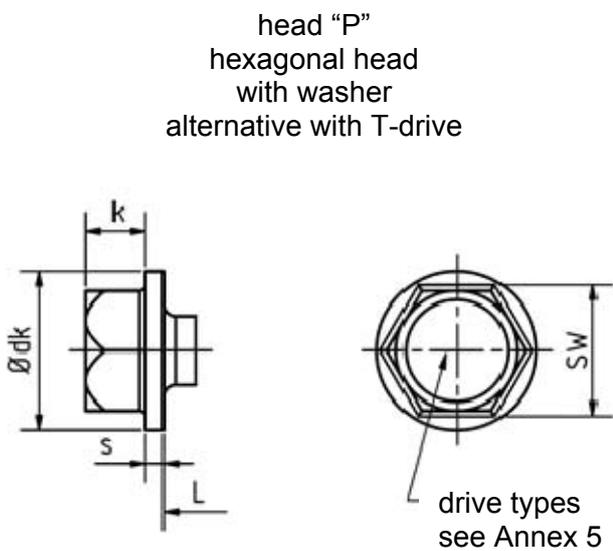

Schmid screws RAPID®, STARDRIVE and SP



Annex 1

of European Technical Assessment  
 ETA-12/0373 of 03.11.2017

Screw head geometry

Dim	head "A" counter-sunk head		head "B" countersunk head with raise			head "C" small countersunk head		head "D" pan head		
	∅dk	k1	∅dk	k	k1	∅dk	k1	∅dk	k	k1
4,0	8.0 ±0.70	3.0 ±0.30	8.0 ±0.70	1.0 ±0.50	4.0 ±0.40	7.0 ±0.60	2.6 ±0.26	8.0 ±0.55	2.8 ±0.28	1.2 ±0.24
4,5	9.0 ±0.70	3.5 ±0.35	9.0 ±0.70	1.2 ±0.50	4.5 ±0.45	8.0 ±0.70	3.0 ±0.30	9.0 ±0.60	3.0 ±0.30	1.4 ±0.28
5,0	10.0 ±0.80	4.5 ±0.45	10.0 ±0.80	1.2 ±0.50	5.5 ±0.55	9.0 ±0.70	3.5 ±0.35	10.0 ±0.65	3.5 ±0.35	1.5 ±0.30
6,0	12.0 ±0.90	5.5 ±0.55	12.0 ±0.90	1.4 ±0.60	6.6 ±0.66	11.0 ±0.80	4.5 ±0.45	12.0 ±0.70	4.1 ±0.41	1.7 ±0.34
7,0	14.0 ±1.00	6.0 ±0.60	14.0 ±1.00	1.6 ±0.70	7.2 ±0.72	12.0 ±0.90	5.5 ±0.55	14.0 ±0.85	4.5 ±0.45	2.1 ±0.42
8,0	15.0 ±1.20	7.0 ±0.70	15.0 ±1.20	2.0 ±0.80	8.3 ±0.83	14.0 ±1.00	6.0 ±0.60			
10,0	18.5 ±1.50	9.0 ±0.90	18.5 ±1.50	2.5 ±0.90	10.5 ±1.05	15.0 ±1.20	7.0 ±0.70			
12,0	21.0 ±2.00	10.0 ±1.00	21.0 ±2.00	2.8 ±1.00	12.0 ±1.20	18.5 ±1.50	9.0 ±0.90			

Dim	head "E" pear head		head "F" washer head				head "G" small washer head			
	∅dk	k1	∅dk	k	k1	s	∅dk	k	k1	s
4,0			11.0 ±0.60	2.2 ±0.8	1.1 ±0.6	1.1 ±0.6	9.6 ±0.50	2.2 ±0.8	1.1 ±0.6	1.1 ±0.6
4,5			12.0 ±0.70	2.4 ±0.8	1.2 ±0.6	1.3 ±0.6	10.8 ±0.60	2.4 ±0.8	1.2 ±0.6	1.3 ±0.6
5,0			14.0 ±0.80	2.6 ±0.9	1.2 ±0.6	1.3 ±0.6	12.5 ±0.70	2.6 ±0.9	1.2 ±0.6	1.3 ±0.6
6,0	10,3±0.51	7.0 ±1.0	17.0 ±1.00	3.0 ±1.0	1.4 ±0.8	1.5 ±0.8	14.0 ±0.80	3.0 ±1.0	1.4 ±0.8	1.5 ±0.8
7,0	11.0 ±0.55	7.2 ±1.2	18.0 ±1.20	3.3 ±1.0	1.8 ±0.9	1.5 ±0.8	17.0 ±1.00	3.3 ±1.0	1.8 ±0.9	1.5 ±0.8
8,0	11.5 ±0.65	7.5 ±1.2	22.0 ±1.50	3.5 ±1.0	1.9 ±1.0	2.0 ±0.9	20.0 ±1.50	3.5 ±1.0	1.9 ±1.0	2.0 ±0.9
10,0	12.0 ±0.75	9.5 ±1.5	27.0 ±2.00	4.7 ±1.2	2.6 ±1.5	2.0 ±0.9	25.0 ±2.00	4.5 ±1.2	2.6 ±1.5	2.0 ±0.9
12,0	16.0 ±0.90	13.0 ±2.0	30.0 ±2.00	5.8 ±1.5	3.5 ±1.7	2.5 ±0.9	27.0 ±2.00	4.7 ±1.2	3.0 ±1.6	2.5 ±0.9

Dim	head "H" universal head with thick shaft			head "J" kombi hexagonal head with thick shaft				head "K" countersunk head with thick shaft		
	∅dk	k1	∅d4	SW=∅dk	k	k1	∅d4	∅dk	k1	∅d4
4,0								8.0 ±0.70	7.5 ±0.9	4.0 ±0.40
4,5								9.0 ±0.70	8.2 ±1.0	4.5 ±0.45
5,0				7.0 -0.35	2.0 ±1.3	4.0 ±1.0	5.0 ±0.50	10.0 ±0.80	8.8 ±1.0	5.0 ±0.50
6,0	9.5 ±0.47	5.5 ±1.0	6.0 ±0.60	9.0 -0.45	3.0 ±1.3	4.7 ±1.0	6.0 ±0.60	12.0 ±0.90	10.0 ±1.3	6.0 ±0.60
7,0	11.0 ±0.55	6.0 ±1.3	7.0 ±0.70	10.0 -0.50	4.0 ±1.3	5.4 ±1.0	7.0 ±0.70	14.0 ±1.00	11.3 ±1.5	7.0 ±0.70
8,0	12.5 ±0.62	7.0 ±1.5	8.0 ±0.80	12.0 -0.60	4.5 ±1.3	6.3 ±1.0	8.0 ±0.80	15.0 ±1.20	12.5 ±1.5	8.0 ±0.80
10,0	15.0 ±0.75	8.0 ±1.8	10.0 ±1.00	15.0 -0.75	5.0 ±1.3	8.0 ±1.5	10.0 ±1.00	18.5 ±1.50	15.0 ±2.0	10.0 ±1.00
12,0	17.0 ±0.85	9.0 ±2.0	12.0 ±1.20	17.0 -0.85	5.5 ±1.3	10.0 ±2.0	12.0 ±1.20	21.0 ±2.00	17.5 ±2.3	20.0 ±1.20

Dim	head "L" cylinder head		head "M" countersunk washer				head "N" Supersenkfix head			
	∅dk	k1	∅dw=∅dk	∅d6	∅d5	hw	∅dk	∅d4	k	s
4,0										
4,5	6.7 ±0.33	2.8 ±0.6								
5,0	7.2 ±0.36	3.8 ±0.7								
6,0	8.15 ±0.40	4.7 ±0.8	22.0 ±2.0	14.5 ±1.5	8.5 ±1.0	4.5 ±1.0	13.0 ±0.65	8.0 ±0.4	2.0 ±0.2	1.25 ±1.0
7,0	9.2 ±0.46	6.0 ±0.9	25.0 ±2.0	16.0 ±1.6	9.0 ±1.0	5.5 ±1.0				
8,0	10.2 ±0.51	7.5 ±1.0	28.0 ±2.0	19.0 ±1.9	10.0 ±2.0	6.0 ±1.0	19.0 ±1.5	10.0 ±0.5	2.4 ±0.3	2.0 ±1.0
10,0	13.4 ±0.67	8.0 ±1.0	35.0 ±3.0	22.5 ±2.2	12.0 ±2.0	7.0 ±1.0	24.0 ±2.5	13.0 ±0.65	3.0 ±0.3	3.0 ±1.0
12,0	14.2 ±0.71	10.0 ±1.5	42.0 ±3.0	25.0 ±2.5	14.0 ±2.0	7.5 ±1.0	26.0 ±2.5	13.0 ±0.65	3.0 ±0.3	3.0 ±1.0

Schmid screws RAPID®, STARDRIVE and SP



Screw head geometry

Annex 1

of European Technical Assessment  
ETA-12/0373 of 03.11.2017

electronic copy electronic copy

Dim	head "P" hexagonal head with washer				head "R" hexagonal head with large washer				head "S" round pan head with thick shaft				head "T" 60° counter- sunk head	
	Ødk	k	s	SW	Ødk	k	s	SW	Ødk	k	k1	Ød4	Ødk	k1
5										7.5 ±0.5	3.0 ±0.5	3.2 ±0.5	4.7 ±0.5	
5,5													7.5 ±0.5	4.0 ±0.4
7,5	13.0 ±0.65	5.0 ±1.3	1.3 ±0.2	10 ±0.2	18.0 ±0.9	5.0 ±1.3	1.3 ±0.2	10 ±0.2						
9,5	16.0 ±0.8	7.0 ±1.3	1.5 ±0.3	13 ±0.2	21.0 ±1.05	7.0 ±1.3	1.5 ±0.3	13 ±0.2						


**Schmid screws RAPID®, STARDRIVE and SP**



Screw head geometry

Annex 1

of European Technical Assessment  
 ETA-12/0373 of 03.11.2017

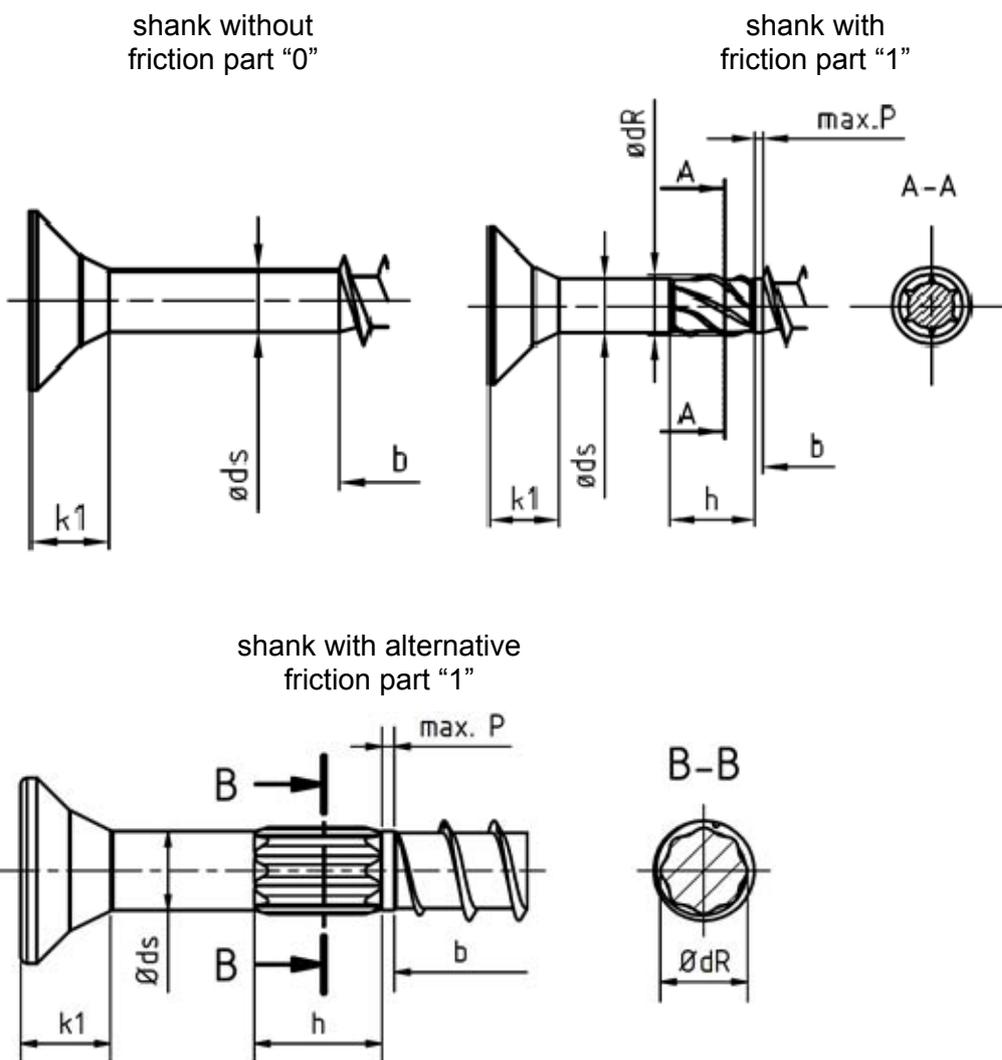

Number of flanks: 5-8

Dim	$\varnothing ds$ gleich für "0"+"1"	$\varnothing dR$	h	alternative h
4,0	$2.8 \pm 0.14$	$3.2 \pm 0.3$	$6.2 \pm 1.0$	$3.4 \pm 1.0$
4,5	$3.2 \pm 0.16$	$3.6 \pm 0.3$	$8.2 \pm 1.0$	$3.8 \pm 1.0$
5,0	$3.5 \pm 0.17$	$4.1 \pm 0.4$	$8.2 \pm 1.0$	$4.2 \pm 1.0$
6,0	$4.3 \pm 0.21$	$5.0 \pm 0.5$	$10.2 \pm 1.0$	$5.0 \pm 1.0$
7,0	$5.0 \pm 0.25$	$6.0 \pm 0.6$	$10.2 \pm 1.0$	
8,0	$5.9 \pm 0.29$	$6.8 \pm 0.6$	$10.2 \pm 1.0$	
10,0	$7.1 \pm 0.35$	$8.3 \pm 0.8$	$10.2 \pm 1.0$	
12,0	$8.2 \pm 0.41$	$9.7 \pm 0.9$	$14.2 \pm 1.0$	

„2“ screw assembly: screw head, support  
 thread, shank with friction part  
 see Annex 0  
 for screws with 2 threads  $b_1 = 0$

for thread “E” with  $d = 8$  mm:  
 see Annex 3  
 $\varnothing ds = 6.4 \pm 0.29$  mm


Schmid screws RAPID®, STARDRIVE and SP



Shank and compressor geometry

Annex 2

of European Technical Assessment  
 ETA-12/0373 of 03.11.2017

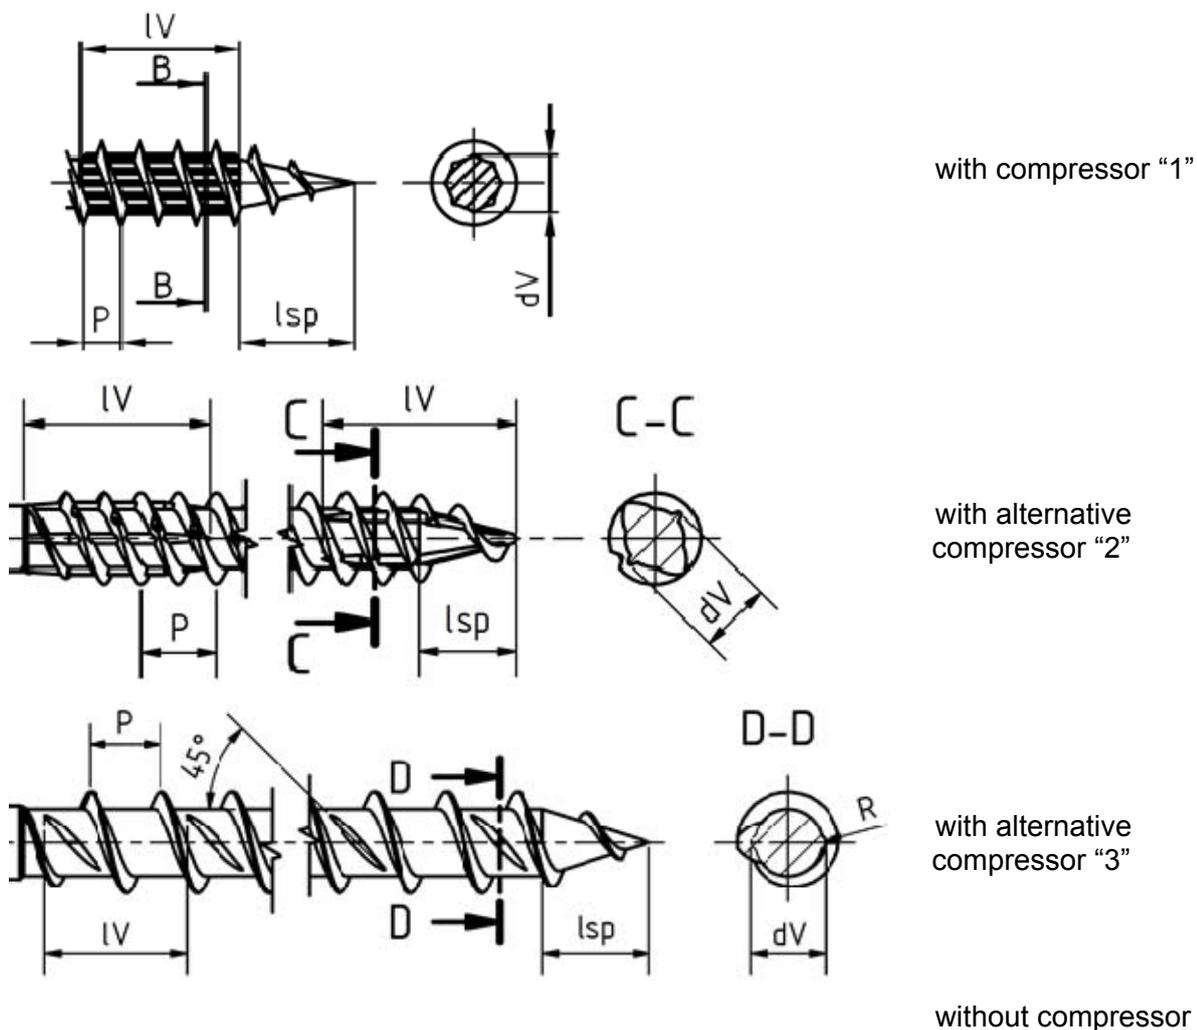

with compressor "1"

with alternative  
 compressor "2"

with alternative  
 compressor "3"

without compressor "0"

Dim	dV
4,0	2.8 ±0.28
4,5	3.0 ±0.31
5,0	3.6 ±0.36
6,0	4.4 ±0.43
7,0	5.0 ±0.50
8,0	6.0 ±0.59
10,0	7.1 ±0.72
12,0	7.9 ±0.80

number of flanks: 4-8  
 $IV = 2P \text{ to } 4P$  (1P for  $l \leq 100$ )

thread types according to Annex 3  
 $l_{sp}$  ( $l_p$ ) according to Annex 4







**Schmid screws RAPID®, STARDRIVE and SP**



Annex 2

of European Technical Assessment  
 ETA-12/0373 of 03.11.2017

Shank and compressor geometry

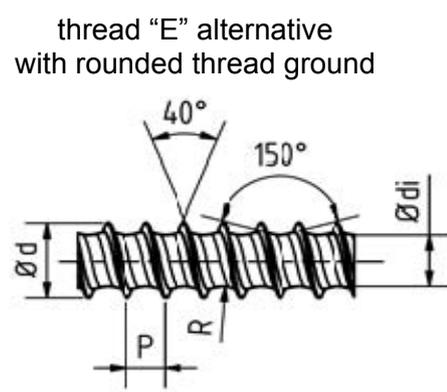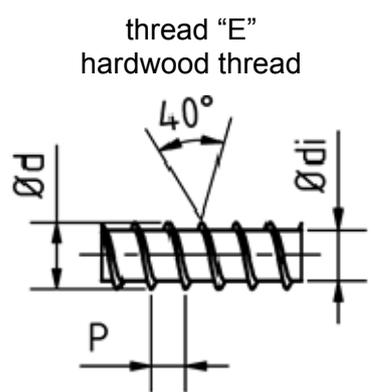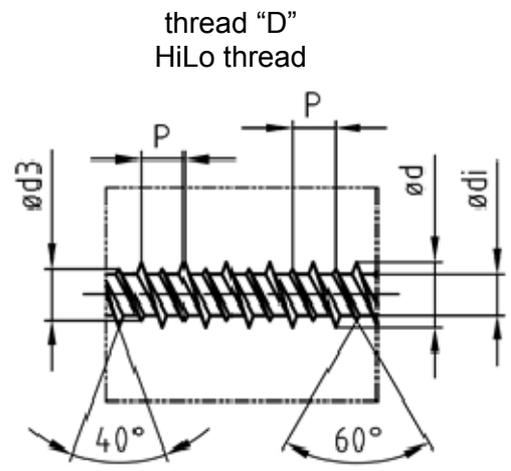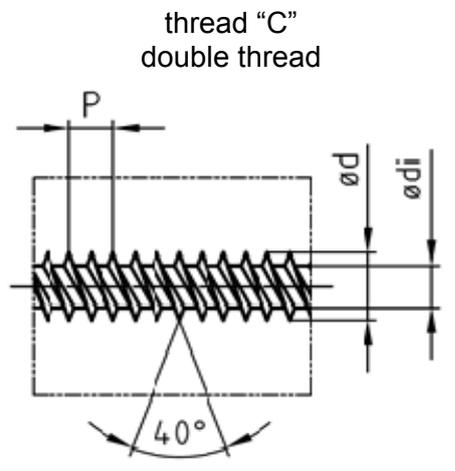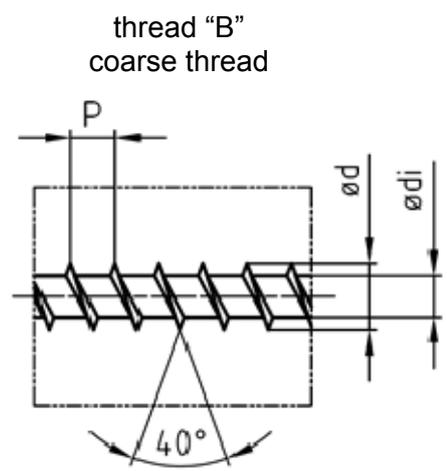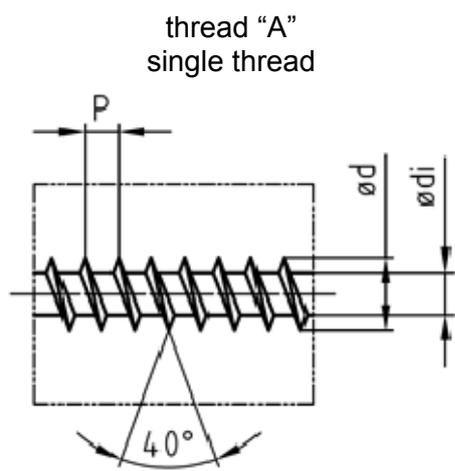

Schmid screws RAPID®, STARDRIVE and SP




Annex 3  
 of European Technical Assessment  
 ETA-12/0373 of 03.11.2017

Thread and cutting groove geometry

electronic copy

thread with cutting groove "1" (without cutting groove "0")

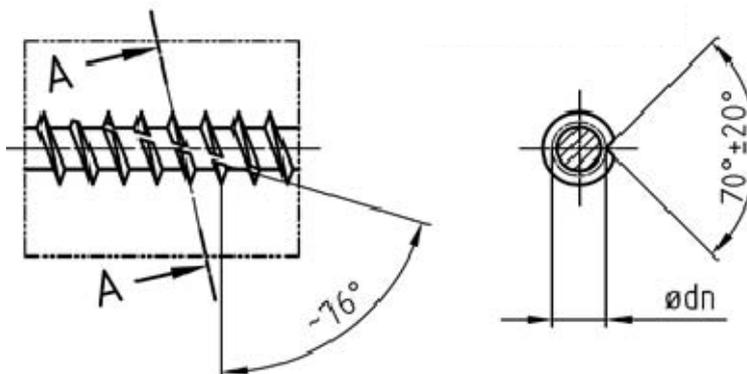

Dim	Ød	thread "A" single thread		thread "B" coarse thread		thread "C" double thread	
		Ødi	P	Ødi	P	Ødi	P
4,0	4.0 ±0.20	2.45 ±0.13	1.8 ±0.18	2.55 ±0.13	2.2 ±0.22	2.40 ±0.12	3.4 ±0.34
4,5	4.5 ±0.22	2.70 ±0.14	2.0 ±0.20	2.75 ±0.14	2.4 ±0.24	2.70 ±0.14	3.8 ±0.38
5,0	5.0 ±0.25	3.15 ±0.16	2.2 ±0.22	3.25 ±0.17	2.7 ±0.27	3.10 ±0.16	4.2 ±0.42
6,0	6.0 ±0.30	3.80 ±0.19	2.6 ±0.26	3.95 ±0.20	3.4 ±0.34	3.80 ±0.19	5.0 ±0.50
7,0	7.0 ±0.35	4.35 ±0.22	3.3 ±0.33	4.40 ±0.22	4.6 ±0.46	4.30 ±0.22	6.4 ±0.64
8,0	8.0 ±0.40	5.20 ±0.26	3.8 ±0.38	5.30 ±0.26	5.6 ±0.56	5.20 ±0.26	7.8 ±0.78
10,0	10.0 ±0.60	6.10 ±0.31	4.5 ±0.45	6.20 ±0.50	6.6 ±0.66	6.10 ±0.31	9.7 ±0.97
12,0	12.0 ±0.70	6.80 ±0.34	6.2 ±0.62	6.90 ±0.60	6.6 ±0.66	6.80 ±0.34	13.4 ±1.34

Dim	thread "D" HiLo thread			thread "E" hardwood thread		cutting groove Ødn
	Ødi	Ød3	P	Ødi	P	
4,0	2.40 ±0.12	3.0 ±0.15	2.8 ±0.28	3.00 ±0.15	2.0 ±0.20	3.1 ±0.32
4,5	2.60 ±0.13	3.3 ±0.16	2.9 ±0.29	3.40 ±0.17	2.2 ±0.22	3.5 ±0.35
5,0	3.10 ±0.16	3.7 ±0.18	3.2 ±0.32	3.80 ±0.19	2.5 ±0.25	3.9 ±0.39
6,0	3.80 ±0.19	4.9 ±0.24	3.8 ±0.38	4.50 ±0.23	3.0 ±0.30	4.7 ±0.53
7,0	4.40 ±0.22	5.4 ±0.27	4.5 ±0.45	5.30 ±0.27	3.5 ±0.35	5.5 ±0.54
8,0	5.30 ±0.27	6.6 ±0.33	6.7 ±0.67	6.10 ±0.31	4.0 ±0.40	7.1 ±0.73
10,0	6.20 ±0.31	7.9 ±0.40	7.7 ±0.77	7.20 ±0.36	5.0 ±0.50	8.4 ±0.87
12,0	7.10 ±0.36	9.1 ±0.46	8.7 ±0.87	8.20 ±0.41	6.0 ±0.60	8.9 ±0.89

Ød...similar for all threads

Schmid screws RAPID®, STARDRIVE and SP




Thread and cutting groove geometry


Annex 3

of European Technical Assessment  
 ETA-12/0373 of 03.11.2017

point "A"  
 regular point




point "B"  
 milling thread

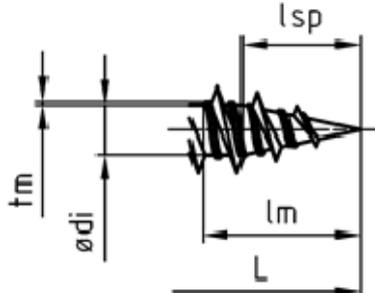


$$l_m = l_{sp} + 1,0P$$


point "C"  
 half cut

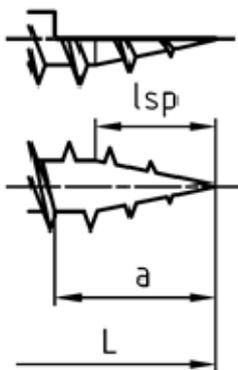


point "D"  
 scraping

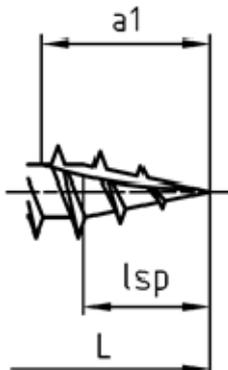

point "E"  
 drill point  
 (alternative with thread)

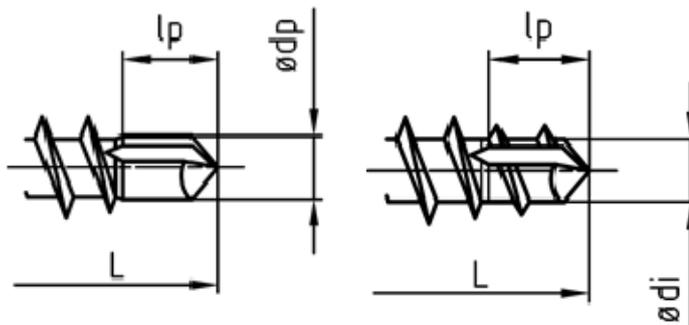

point "F"  
 drill point

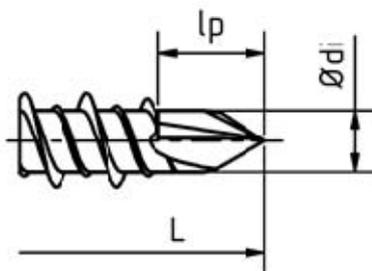

Schmid screws RAPID®, STARDRIVE and SP




Annex 4

of European Technical Assessment  
 ETA-12/0373 of 03.11.2017

Point geometry





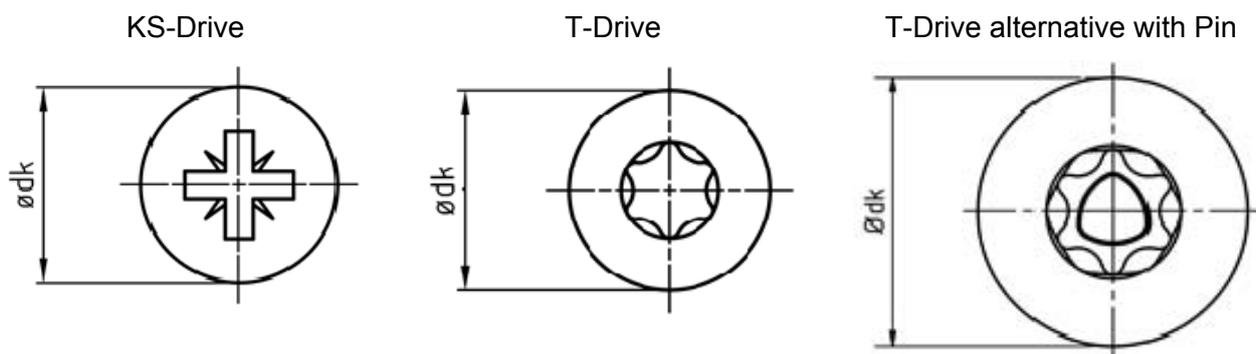

Dim	KS	T / Sonderantrieb
4.0	KS 2	T10 / T15 / T20
4.5	KS 2	T15 / T20 / T25
5.0	KS 2	T20 / T25 / T30
6.0	KS 3	T20 / T25 / T30
7.0	KS 3	T25 / T30
8.0	KS 4	T30 / T40
10.0	KS 4	T40 / T50
12.0	KS 4	T40 / T50 / T55

head labelling optional

alternative UKR

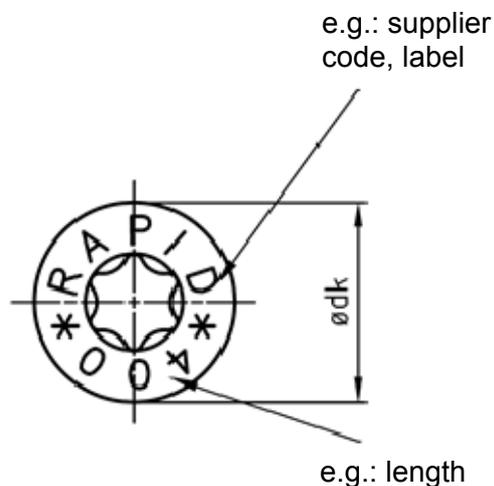

Schmid screws RAPID®, STARDRIVE and SP



Drive types and head labeling

Annex 5

of European Technical Assessment  
 ETA-12/0373 of 03.11.2017

**Table A6.1: Characteristic head pull-through capacities of Schmid screws RAPID®, STARDRIVE and SP in solid softwood or glued laminated timber for 90° heads; head diameter 8 to 21 mm**

Group 1			Head diameter (90° heads) <sup>1)</sup>							
Product characteristic			8	9	10	12	14	15	18.5	21
Characteristic head pull-through parameter ( $\rho_k = 350 \text{ kg/m}^3$ )	$f_{\text{head,k}}$	N/mm <sup>2</sup>	17.1	17.6	14.6	14.6	13.1	12.4	12.2	10.3

<sup>1)</sup> Linear interpolation is possible for head diameters in between the stated values

**Table A6.2: Characteristic head pull-through capacities of Schmid screws RAPID®, STARDRIVE and SP in solid softwood or glued laminated timber for washers and 180° heads; washer diameter 14 to 42 mm**

Group 2			Head diameter (180° heads) <sup>1)</sup>							
Product characteristic			14	20	22	25	27	33	42	
Characteristic head pull-through parameter ( $\rho_k = 350 \text{ kg/m}^3$ )	$f_{\text{head,k}}$	N/mm <sup>2</sup>	16.7	17.6	20.4	15.2	14.5	10.0	6.5	
	$f_{\text{head,k}}$ head "N"		16.7	23.5	20.4	15.2	14.5	10.0	6.5	

<sup>1)</sup> Linear interpolation is possible for head diameters in between the stated values

**Table A6.3: Characteristic load bearing capacities of Schmid screws RAPID®, STARDRIVE and SP for product characteristic group A; screw diameter 4 to 6 mm**

Product characteristic group A			Screw diameter			
Product characteristic			4	4.5	5	6
Max. length	$l_{\text{max}}$	mm	70	80	120	300
Characteristic tensile strength	$f_{\text{tens,k}}$	kN	5.0	5.8	8.5	12.4
Characteristic yield moment	$M_{y,k}$	Nm	3.2	4.9	6.5	10.1
Characteristic withdrawal parameter angle screw-axis to grain: 90° ( $\rho_k = 350 \text{ kg/m}^3$ )	$f_{\text{ax,k,90}^\circ}$	N/mm <sup>2</sup>	14.8	13.8	12.8	12.1
Characteristic yield strength	$f_{y,k}$	N/mm <sup>2</sup>	900			
Characteristic torsional strength	$f_{\text{tor,k}}$	Nm	3.0	4.2	6.2	9.5
Insertion moment ( $\rho_k = 450 \text{ kg/m}^3$ )	$R_{\text{tor,m}}$	Nm	1.4	1.9	3.8	6.5

Schmid screws RAPID®, STARDRIVE and SP



Characteristic data of the screws

Annex 6

of European Technical Assessment  
 ETA-12/0373 of 03.11.2017

**Table A6.4: Characteristic load bearing capacities of Schmid screws RAPID®, STARDRIVE and SP for product characteristic group A; screw diameter 7 to 12 mm**

Product characteristic group A			Screw diameter			
Product characteristic			7	8	10	12
Max. length	$l_{max}$	mm	300	400	500	500
Characteristic tensile strength	$f_{tens,k}$	kN	17.1	22.0	32.0	42.0
Characteristic yield moment	$M_{y,k}$	Nm	12.6	22.6	33.0	58.6
Characteristic withdrawal parameter angle screw-axis to grain: 90° ( $\rho_k = 350 \text{ kg/m}^3$ )	$f_{ax,k,90^\circ}$	N/mm <sup>2</sup>	11.5	10.9	9.8	8.9
Characteristic yield strength	$f_{y,k}$	N/mm <sup>2</sup>	900			
Characteristic torsional strength	$f_{tor,k}$	Nm	16.1	24.8	44.8	59.6
Insertion moment ( $\rho_k = 450 \text{ kg/m}^3$ )	$R_{tor,m}$	Nm	8.1	16.5	28.0	27.0

Schmid screws RAPID®, STARDRIVE and SP



Characteristic data of the screws

Annex 6

of European Technical Assessment  
 ETA-12/0373 of 03.11.2017

**Table A6.5: Characteristic load bearing capacities of Schmid screws RAPID®, STARDRIVE and SP for product characteristic group B; screw diameter 4 to 10 mm**

Product characteristic group B				Screw diameter					
Product characteristic				4	4.5	5	6	8	10
Max. length	carbon steel	$l_{max}$	mm	70	80	120	300	500	500
	stainless steel			-	-	-	-	240	-
Characteristic tensile strength	carbon steel	$f_{tens,k}$	kN	5.0	5.8	8.8	12.8	22.7	33.2
	stainless steel			-	-	-	-	16.0	-
Characteristic yield moment	carbon steel	$M_{y,k}$	Nm	3.2	4.9	6.5	10.1	22.6	33.0
	stainless steel			-	-	-	-	16.6	-
Characteristic withdrawal parameter angle screw-axis to grain: 90° ( $\rho_k = 350 \text{ kg/m}^3$ )		$f_{ax,k,90^\circ}$	N/mm <sup>2</sup>	14.8	13.8	13.6	13.0	10.7	9.5
Characteristic yield strength		$f_{y,k}$	N/mm <sup>2</sup>	900 (carbon steel) 735 (stainless steel)					
Characteristic torsional strength	carbon steel	$f_{tor,k}$	Nm	3.0	4.2	6.3	10.1	25.6	47.5
	stainless steel			-	-	-	-	18.8	-
Insertion moment	carbon steel $\rho_k = 450 \text{ kg/m}^3$	$R_{tor,m}$	Nm	1.2	1.6	2.1	2.5	8.3	14.2
	stainless steel $\rho_k = 480 \text{ kg/m}^3$			-	-	-	-	8.0	-

Schmid screws RAPID®, STARDRIVE and SP



Characteristic data of the screws

Annex 6

of European Technical Assessment  
 ETA-12/0373 of 03.11.2017

**Table A6.6: Characteristic load bearing capacities of Schmid screws RAPID®, STARDRIVE and SP for product characteristic group C; screw diameter 4 to 10 mm**

Product characteristic group C			Screw diameter					
Product characteristic			4	4.5	5	6	8	10
Max. length	$l_{max}$	mm	70	80	120	300	500	500
Characteristic tensile strength	$f_{tens.k}$	kN	5.0	7.0	8.8	13.1	23.3	35.0
Characteristic yield moment	$M_{y.k}$	Nm	3.1	4.2	5.9	10.7	22.6	33.6
Characteristic withdrawal parameter angle screw-axis to grain: 90° ( $\rho_k = 350 \text{ kg/m}^3$ )	$f_{ax.k.90^\circ}$	N/mm <sup>2</sup>	14.3	13.3	13.6	13.0	10.9	11.0
Characteristic yield strength	$f_{y.k}$	N/mm <sup>2</sup>	900					
Characteristic torsional strength	$f_{tor.k}$	Nm	3.5	4.9	6.6	10.9	28.0	52.5
Insertion moment ( $\rho_k = 450 \text{ kg/m}^3$ )	$R_{tor.m}$	Nm	1.2	1.9	3.2	5.4	11.2	17.0

Schmid screws RAPID®, STARDRIVE and SP



Characteristic data of the screws

Annex 6

of European Technical Assessment  
 ETA-12/0373 of 03.11.2017

**Table A6.7: Characteristic load bearing capacities of Schmid screws RAPID®, STARDRIVE and SP for product characteristic group D; screw diameter 6 to 10 mm**

Product characteristic group D			Screw diameter		
Product characteristic			6	8	10
Max. length	$l_{max}$	mm	220	400	400
Characteristic tensile strength	$f_{tens.k}$	kN	12.5	23.5	33.0
Characteristic yield moment	$M_{y.k}$	Nm	10.0	24.0	35.8
Characteristic withdrawal parameter angle screw-axis to grain: 90° ( $\rho_k = 350 \text{ kg/m}^3$ )	$f_{ax.k.90^\circ}$	N/mm <sup>2</sup>	13.5	10.9	11.5
Characteristic yield strength	$f_{y.k}$	N/mm <sup>2</sup>	950		
Characteristic torsional strength	$f_{tor.k}$	Nm	10.4	26.5	47.0
Insertion moment ( $\rho_k = 450 \text{ kg/m}^3$ )	$R_{tor.m}$	Nm	6.9	15.6	23.0
Half cut	$R_{tor.m. HT}$	Nm	-	13.0	17.6
Slip modulus	$K_{ser}$	N/mm	see A.6.4		

Schmid screws RAPID®, STARDRIVE and SP



Characteristic data of the screws

Annex 6

of European Technical Assessment  
 ETA-12/0373 of 03.11.2017

**Table A6.8: Characteristic load bearing capacities of Schmid screws RAPID®, STARDRIVE and SP for product characteristic group E; screw diameter 8 to 12 mm**

Product characteristic group E				Screw diameter		
Product characteristic				8	10	12
Max. length	carbon steel	$l_{max}$	mm	1000	1000	1000
	stainless steel			300	-	-
Characteristic tensile strength	carbon steel	$f_{tens.k}$	kN	24.1	40.0	46.7
	stainless steel			13.8	-	-
Characteristic yield moment	carbon steel	$M_{y.k}$	Nm	20.3	36.7	48.5
	stainless steel			14.2	-	-
Characteristic withdrawal parameter angle screw-axis to grain: 90° ( $\rho_k = 350 \text{ kg/m}^3$ )		$f_{ax.k.90^\circ}$	N/mm <sup>2</sup>	13.1	12.5	11.2
Characteristic yield strength		$f_{y.k}$	N/mm <sup>2</sup>	950 (carbon steel) 657 (stainless steel)		
Characteristic torsional strength	carbon steel	$f_{tor.k}$	Nm	25.8	55.0	77.1
	stainless steel			17.5	-	-
Insertion moment	carbon steel $\rho_k = 450 \text{ kg/m}^3$	$R_{tor.m.HT}$	Nm	8.7	15.6	27.9
	stainless steel $\rho_k = 480 \text{ kg/m}^3$			7.9	-	-
Slip modulus		$K_{ser}$	N/mm	see A.6.4		

Schmid screws RAPID®, STARDRIVE and SP



Characteristic data of the screws

Annex 6

of European Technical Assessment  
 ETA-12/0373 of 03.11.2017

**Table A6.9: Characteristic load bearing capacities of Schmid screws RAPID® for product characteristic group F; screw diameter 8 mm**

Product characteristic group F			Screw diameter
Product characteristic			8
Max. length	$l_{max}$	mm	240
Characteristic tensile strength	$f_{tens,k}$	kN	32.8
Characteristic yield moment	$M_{y,k}$	Nm	42.8
Characteristic withdrawal parameter angle screw-axis to grain: 90° and 0° ( $\rho_{k,Bu} = 625 \text{ kg/m}^3$ and $\rho_{k,FSH-Bu} = 740 \text{ kg/m}^3$ )	$f_{ax,k,Bu,90^\circ}$	N/mm <sup>2</sup>	38.7
	$f_{ax,k,Bu,0^\circ}$		25.8
	$f_{ax,k,FSH-Bu,90^\circ}$		50.1
	$f_{ax,k,FSH-Bu,0^\circ}$		38.6
Characteristic yield strength	$f_{y,k}$	N/mm <sup>2</sup>	950
Characteristic torsional strength	$f_{tor,k}$	Nm	39.5
Insertion moment ( $\rho_k = 740 \text{ kg/m}^3$ )	$R_{tor,m,HT}$	Nm	$f_{tor,k} > 1.5 \cdot R_{tor,m,HT}$
Slip modulus angle screw-axis to grain: 90° and 0° ( $\rho_{k,Bu} = 625 \text{ kg/m}^3$ and $\rho_{k,FSH-Bu} = 740 \text{ kg/m}^3$ )	$K_{ser,ax,Bu,90^\circ}$	N/mm	36 700
	$K_{ser,ax,Bu,0^\circ}$		39 100
	$K_{ser,ax,FSH-Bu,90^\circ}$		30 400
	$K_{ser,ax,FSH-Bu,0^\circ}$		36 500

Schmid screws RAPID®, STARDRIVE and SP



Characteristic data of the screws

Annex 6

of European Technical Assessment  
 ETA-12/0373 of 03.11.2017

### A.6.1 General

The characteristic load bearing capacities in Tables A6.1 to A6.8 are given for timber of strength class C24 according to EN 338 ( $\rho_k = 350 \text{ kg/m}^3$ ). For timber with a deviating density the characteristic withdrawal parameter as well as the characteristic head pull-through parameter shall be corrected by the factor

$$k_{dens} = \left( \frac{\rho_k}{350} \right)^{0.8}$$

Where

$\rho_k$  Characteristic density of timber in  $\text{kg/m}^3$

The minimum penetration length of screws in the load-bearing wood-based members shall be  $4 d$ .

A bending angle of  $45^\circ$  must be reached for all screws.

### A.6.2 Characteristic withdrawal parameter

For angles  $0^\circ \leq \alpha \leq 45^\circ$  between screw-axis and direction of wood-fibre,  $f_{ax,k,\alpha}$  is obtained by

$$f_{ax,k,\alpha} = k_{ax} \cdot f_{ax,k,90^\circ}$$

with

$$k_{ax} = 0,3 + \frac{0,7 \cdot \alpha}{45^\circ}$$

For angles  $45^\circ \leq \alpha \leq 90^\circ$  between screw-axis and direction of wood-fibre,  $f_{ax,k,\alpha}$  remains constant.

### A.6.3 Characteristic head pull-through capacity for wood based panels

The characteristic value of the head pull-through parameter for a characteristic density of  $380 \text{ kg/m}^3$  of the timber and for the following wood based panels

- Plywood according to EN 636 and EN 13986,
- Oriented strand boards, OSB, according to EN 300 and EN 13986,
- Solid wood panels according to EN 13353 and EN 13986,
- Particleboard according to EN 312 and EN 13986,
- Fibreboards according to EN 622-2, EN 622-3 and EN 13986,
- Cement-bonded particle boards according to EN 634-1 and EN 13986

with thicknesses of more than 20 mm is

$$f_{head,k} = 10 \text{ N/mm}^2$$

**Schmid screws RAPID®, STARDRIVE and SP**



Characteristic data of the screws

Annex 6

of European Technical Assessment  
 ETA-12/0373 of 03.11.2017

For wood based panels with a thickness between 12 mm and 20 mm the characteristic value of the head pull-through parameter is

$$f_{head,k} = 8 \text{ N/mm}^2$$

For plywood with a minimum of 7 layers and a minimum thickness of 18 mm, the characteristic value of the head pull-through parameter for a characteristic density of 490 kg/m<sup>3</sup> is ( $d_k \geq 18.8 \text{ mm}$ )

$$f_{head,k} = 16 \text{ N/mm}^2$$

For wood based panels with a thickness of less than 12 mm the characteristic head pull-through capacity shall be based on a characteristic value of the head pull-through parameter of 8 N/mm<sup>2</sup>, and limited to 400 N complying with the minimum thicknesses of the wood based panels of 1.2 d, with d as outer thread diameter. In addition the minimum thicknesses of Table A6.10 apply.

**Table A6.10 Minimum thicknesses of wood based panels**

Wood based panel	Minimum thickness in mm
Plywood	6
Oriented strand board, OSB	8
Solid wood panels	12
Particleboard	8
Fibreboards	6
Cement-bonded particle boards	8

#### A.6.4 Slip modulus for mainly axially loaded screws

The axial slip modulus  $K_{ser}$  for the serviceability limit state used for connection of individual members in bending beams under flexible jointing shall be taken for screws independent of angle  $\alpha$  to the grain as

$$K_{ser} = 25 \cdot d \cdot l_{ef} \dots \text{ in N/mm for softwood}$$

$$K_{ser} = 30 \cdot d \cdot l_{ef} \dots \text{ in N/mm for hardwood}$$

with

$d$  = outer thread diameter of the screw in mm

$l_{ef}$  = penetration length of the threaded part of the screw in the timber member in mm

Schmid screws RAPID®, STARDRIVE and SP



Characteristic data of the screws

Annex 6

of European Technical Assessment  
 ETA-12/0373 of 03.11.2017

### A.6.5 Compressive loading for fully threaded screws (unsupported buckling, e.g. soft insulating materials)

The design load carrying capacity for Schmid screws RAPID®, STARDRIVE and SP with a full thread for an angle  $30^\circ \leq \alpha \leq 90^\circ$  between screw-axis and direction of wood-fibre for compressive loading is given as

$$F_{c,\alpha,Rd} = \min \{ F_{ax,\alpha,d} ; F_{ki,d} \} \quad \text{in N}$$

with

$$F_{ax,\alpha,d} = f_{ax,d,\alpha} \cdot d \cdot l_{ef}$$

$f_{ax,d,\alpha}$  = design value of the axial withdrawal capacity of the threaded part of the screw calculated from the characteristic values given in Table A6.3 to A6.8 in N/mm<sup>2</sup>

$d$  = outer thread diameter of the screw in mm

$l_{ef}$  = penetration length of the threaded part of the screw in the timber member in mm

$$F_{ki,d} = F_{ki,k} / \gamma_M = \frac{\chi \cdot N_{pl,k}}{\gamma_M}$$

$$\chi = 1 \text{ for } \bar{\lambda} \leq 0.2 \text{ or } \chi = \frac{1}{\phi + \sqrt{\phi^2 - \bar{\lambda}^2}} \text{ for } \bar{\lambda} > 0.2$$

$$\phi = 0.5 \cdot [1 + 0.49 \cdot (\bar{\lambda} - 0.2) + \bar{\lambda}^2]$$

$$\bar{\lambda} = \sqrt{\frac{N_{pl,k}}{N_{ki,k}}}$$

$$N_{pl,k} = \pi \cdot \frac{d_i^2}{4} f_{y,k} \quad \text{in N}$$

$d_i$  = inner thread diameter for fully threaded screw, shank diameter  $d_s$  for screws with 2 threads

$f_{y,k}$  = characteristic yield strength of the screw according to Table A6.3 to A6.8

$N_{ki,k}$  = characteristic ideal elastic buckling load

$$N_{ki,k} = \sqrt{c_h \cdot E_s \cdot I_s} \quad \text{in N}$$

$c_h$  = elastic foundation of the screw

**Schmid screws RAPID®, STARDRIVE and SP**



Characteristic data of the screws

Annex 6

of European Technical Assessment  
 ETA-12/0373 of 03.11.2017

$$c_h = (0.19 + 0.012 \cdot d) \cdot \rho_k \cdot \left( \frac{90^\circ + \alpha}{180^\circ} \right) \text{ in N/mm}^2$$

$\rho_k$  = characteristic density of the wood-based member in kg/m<sup>3</sup>

$\alpha$  = angle between screw axis and grain direction,  $30^\circ \leq \alpha \leq 90^\circ$

$$E_s \cdot I_s = \frac{210000 \cdot \pi \cdot d_i^4}{64} = \text{bending stiffness in N/mm}^2$$

### A.6.6 Compression reinforcement (screws in timber)

The compression force shall evenly be distributed to the screws used as compression reinforcement. The screws are driven into the timber member perpendicular to the contact surface under an angle between the screw axis and the grain direction of  $45^\circ$  to  $90^\circ$ . The screw heads must be flush with the timber surface.

Reinforcing screws for wood-based panels are not covered by this European Technical Assessment.

For the design of reinforced contact areas the following conditions shall be met independently of the angle between the screw axis and the grain direction.

The design resistance of a reinforced contact area is:

$$R_{90,d} = \min \left\{ \begin{array}{l} k_{c,90} \cdot B \cdot l_{ef,1} \cdot f_{c,90,d} + n \cdot \min \{ F_{ax,\alpha,d}; F_{ki,d} \} \\ B \cdot l_{ef,2} \cdot f_{c,90,d} \end{array} \right\}$$

where:

$k_{c,90}$  = parameter according to EN 1995-1-1, 6.1.5

$B$  = bearing width in mm

$l_{ef,1}$  = effective contact length according to EN 1995-1-1, 6.1.5 in mm

$f_{c,90,d}$  = design compressive strength perpendicular to the grain (EN 338/EN 14081-1) in N/mm<sup>2</sup>

$$n = n_0 \cdot n_{90}$$

$n$  = number of reinforcing screws

$n_0$  = number of reinforcing screws arranged in a row parallel to the grain

$n_{90}$  = number of reinforcing screws arranged in a row perpendicular to the grain

$l_{ef,2}$  = effective contact length in the plane of the screw tips in mm

**Schmid screws RAPID<sup>®</sup>, STARDRIVE and SP**



Characteristic data of the screws

Annex 6




of European Technical Assessment  
 ETA-12/0373 of 03.11.2017

$$l_{ef,2} = \{l_{ef} + (n_0 - 1) \cdot a_1 + \min(l_{ef}; a_{1,c})\} \quad \text{end supports}$$

$$l_{ef,2} = \{2 \cdot l_{ef} + (n_0 - 1) \cdot a_1\} \quad \text{intermediate supports}$$

$l_{ef}$  = penetration length of the threaded part of the screw in the timber member in mm

$a_{1,c}$  = end distance of the centre of gravity of the threaded part in the timber member in mm

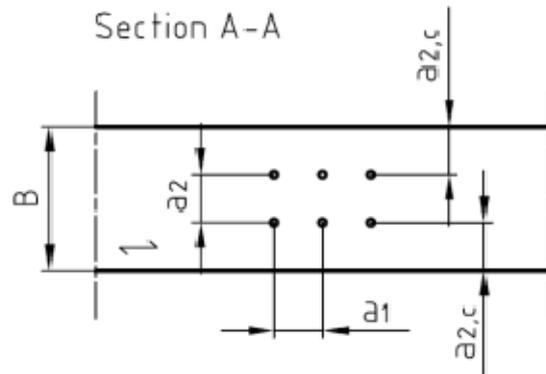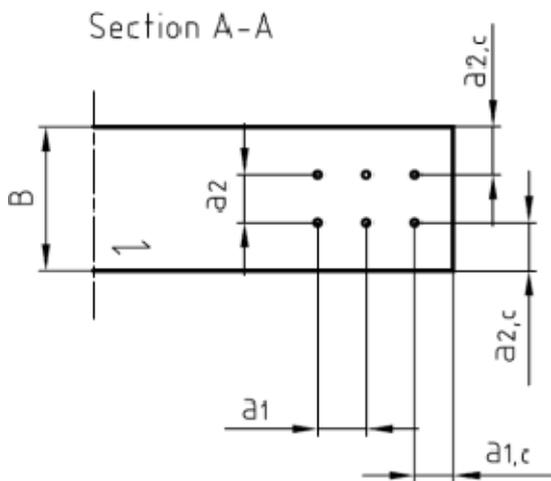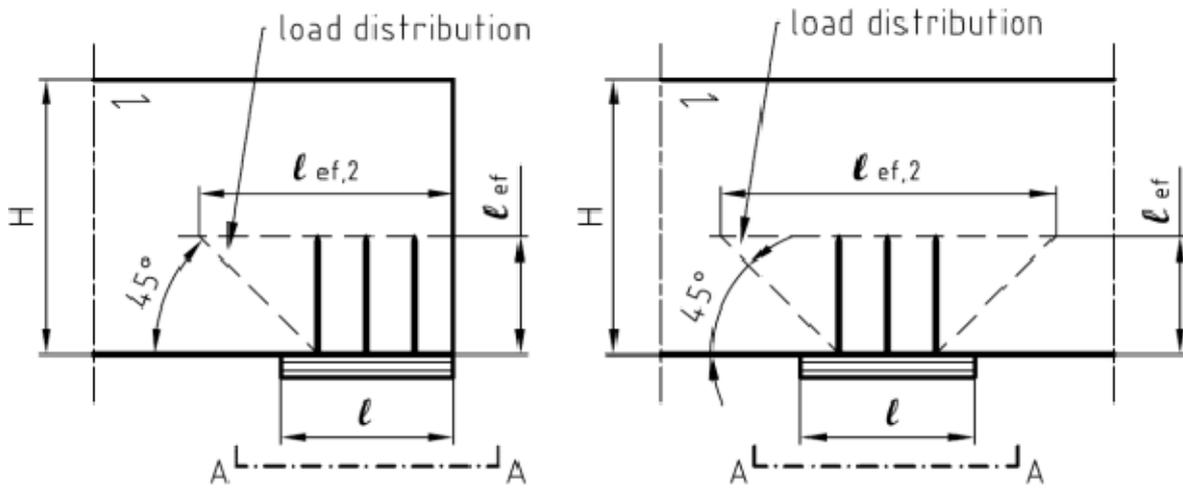

Schmid screws RAPID®, STARDRIVE and SP



Characteristic data of the screws

Annex 6

of European Technical Assessment  
 ETA-12/0373 of 03.11.2017

### A.6.7 Tensile reinforcement perpendicular to the grain

Fully threaded screws may be used as tensile reinforcement perpendicular to the grain of the timber members. The screws are driven into the timber member under an angle between the screw axis and the grain direction of 90°. A minimum of two screws shall be used for tensile reinforcement perpendicular to the grain. Only one screw may be used when the minimum penetration depth of the screws below and above the potential crack is 20 · d where d is the outer thread diameter of the screw.

Tension reinforcement for transverse connections and notches may be designed according to

$$\left[1 - 3 \cdot \alpha^2 + 2 \cdot \alpha^3\right] \cdot F_{90} \leq F_{ax,Rd} \quad \text{for transverse connections with } \alpha = \frac{a}{h}$$

$$1.3 \cdot V_d \cdot \left[3 \cdot (1 - \alpha)^2 - 2 \cdot (1 - \alpha)^3\right] \leq F_{ax,Rd} \quad \text{for notches with } \alpha = \frac{h_e}{h}$$

where

$$F_{ax,Rd} = \min \left\{ \begin{array}{l} f_{ax,d} \cdot d \cdot l_2 \\ F_{t,Rd} \end{array} \right. \quad \text{axial capacity of the reinforcement in N}$$


$F_{90}$  = design value of the force acting in the connection perpendicular to the grain of the timber members in N

$V_d$  = design value of the shear force in N

$f_{ax,d}$  = design value of the withdrawal capacity of the threaded part of the screw in N/mm<sup>2</sup>

$l_2$  = smaller value of the penetration depth below or above the potential crack ( $l_{2,a}$  or  $l_{2,t}$ ) in mm

$F_{t,Rd}$  = design value of the tensile resistance of the screw in N

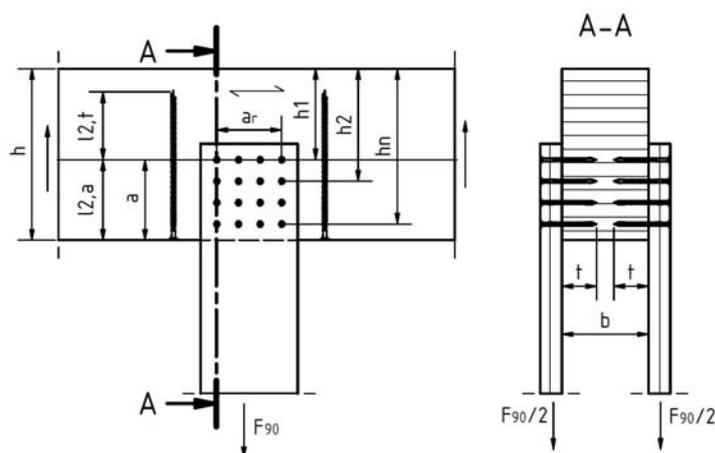


Schmid screws RAPID®, STARDRIVE and SP



Annex 6

of European Technical Assessment  
 ETA-12/0373 of 03.11.2017

Characteristic data of the screws

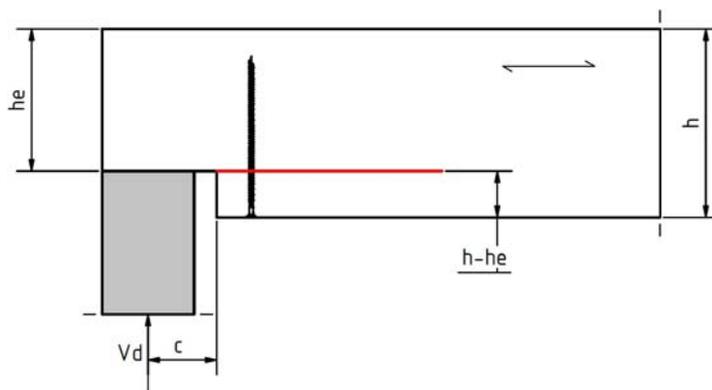

Tension reinforcement of openings may be designed according to

$$F_{t,V,d} + F_{t,M,d} \leq F_{ax,d}$$

where

$$F_{t,V,d} = \frac{V_d \cdot h_d}{4 \cdot h} \cdot \left( 3 - \frac{h_d^2}{h^2} \right)$$

$F_{t,V,d}$  = design value of tension force perpendicular to the grain due to lateral force in N

$$F_{t,M,d} = 0.008 \cdot \frac{M_d}{h_r}$$

$F_{t,M,d}$  = design value of tension force perpendicular to the grain due to bending moment in N

$V_d$  = design value of the lateral force in the edge of the opening in N

$h$  = height of the timber member in mm

$h_d$  = height of the opening for rectangular openings or 70 % of opening diameter for circular openings in mm

$M_d$  = design value of bending moment in the edge of the opening in Nmm

$h_r$  = min ( $h_{ro}$  ;  $h_{ru}$ ) for rectangular openings or min ( $h_{ro} + 0.15 h_d$  ;  $h_{ru} + 0.15 h_d$ ) for circular openings in mm

$F_{ax,d}$  = design load bearing capacity for the screws perpendicular to the grain with  $l_{ef}$  as the smaller length above or below the potential crack in N


Schmid screws RAPID®, STARDRIVE and SP



Characteristic data of the screws

Annex 6

of European Technical Assessment  
 ETA-12/0373 of 03.11.2017

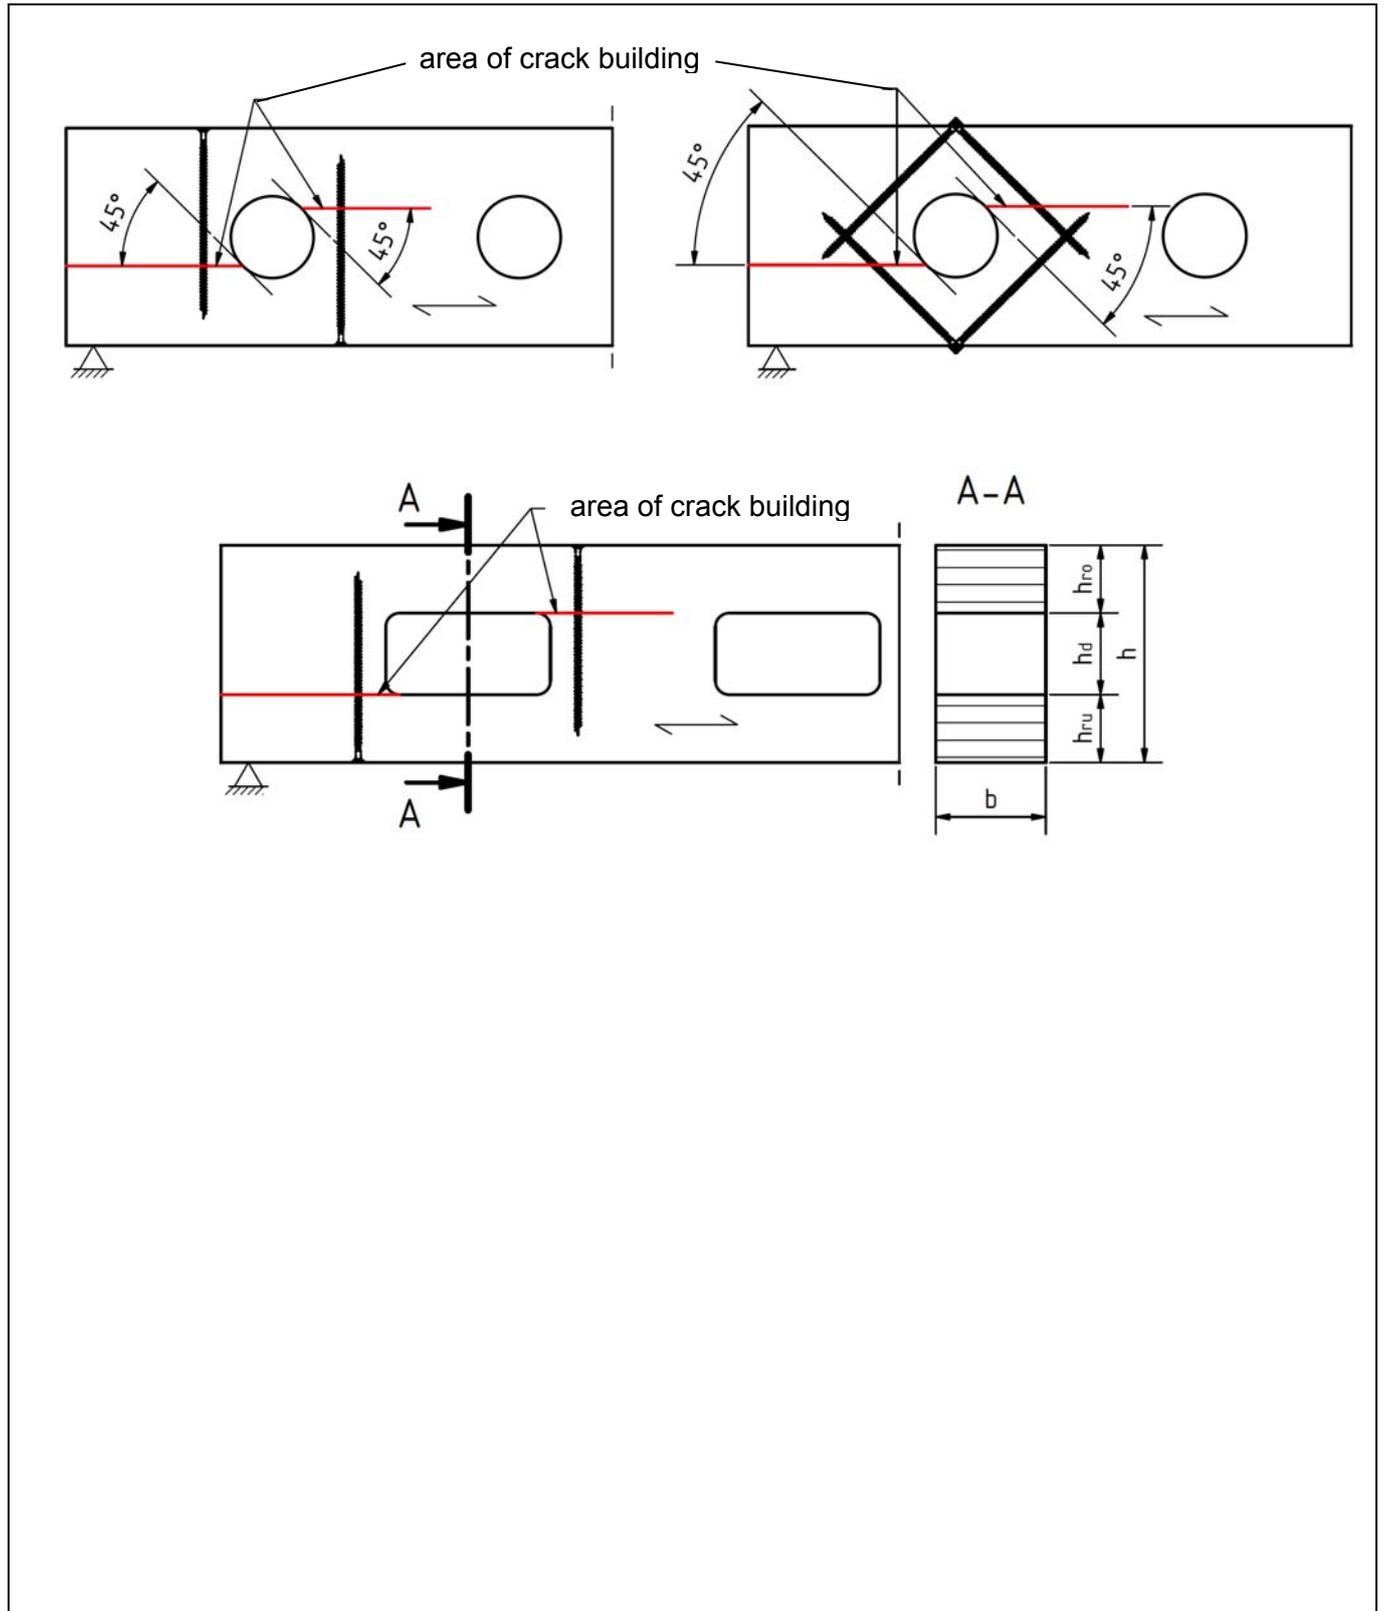

Schmid screws RAPID®, STARDRIVE and SP



Characteristic data of the screws

Annex 6


of European Technical Assessment  
 ETA-12/0373 of 03.11.2017

**A.6.8 Shear reinforcement**

Fully threaded screws may be used as shear reinforcement of solid timber, glued laminated timber and glued solid timber of softwood. The provisions are valid for straight beams with constant rectangular cross-section. The screws are driven into the timber member under an angle between the screw axis and the grain direction of 45°.

A minimum of four screws shall be used for shear reinforcement in a line parallel to the grain whereas the spacing between the screws shall not exceed the depth h of the timber member. If the screws are arranged in one line parallel to the grain, it shall be done centrally in relation to the beam width.

The effect of the reinforcement is limited to the shaded part of the timber member. Outside this area sufficient shear strength of the cross section must be verified.

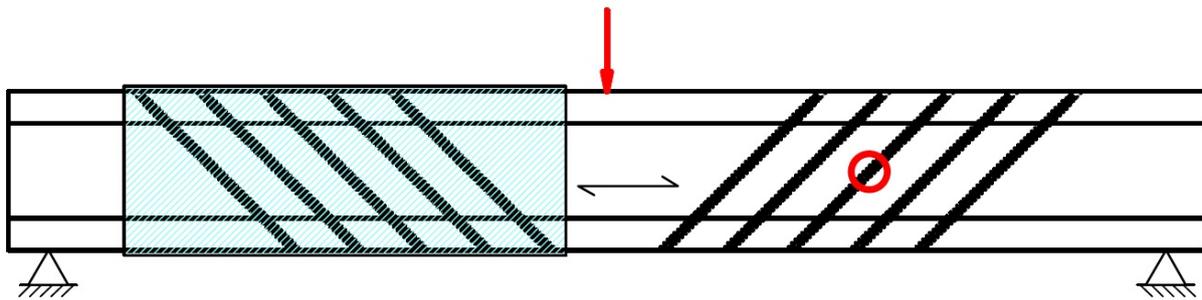

Shear reinforcement may be designed according to

$$\tau_d \leq \frac{f_{v,d} \cdot k_\tau}{\eta_H}$$

where

$\tau_d$  = design value of shear stress in N/mm<sup>2</sup>

$f_{v,d}$  = design value of shear strength in N/mm<sup>2</sup>

$$k_\tau = 1 - 0.46 \cdot \sigma_{90,d} - 0.052 \cdot \sigma_{90,d}^2$$

$$\sigma_{90,d} = \frac{F_{ax,d}}{\sqrt{2} \cdot b \cdot a_1} \quad \text{design value of stress perpendicular to the grain in N/mm}^2$$

$b$  = width of the timber member in mm

$a_1$  = spacing of screws parallel to the grain in mm

$$F_{ax,d} = \frac{\sqrt{2} \cdot (1 - \eta_H) \cdot V_d \cdot a_1}{h}$$

$V_d$  = design shear force in N

**Schmid screws RAPID®, STARDRIVE and SP**



Characteristic data of the screws

Annex 6

of European Technical Assessment  
 ETA-12/0373 of 03.11.2017

electronic copy

$h$  = height of the timber member in mm

$$\eta_H = \frac{G \cdot b}{G \cdot b + \frac{1}{2 \cdot \sqrt{2} \left( \frac{6}{\pi \cdot d \cdot h \cdot k_{ax}} + \frac{a_1}{EA_S} \right)}}$$

$G$  = mean value of shear modulus of the timber member in N/mm<sup>2</sup>

$d$  = outer thread diameter of the screw in mm

$k_{ax}$  = connection stiffness between screw and timber member in N/mm<sup>3</sup>,  
 $k_{ax} = 12.5$  N/mm<sup>3</sup> for RAPID® fully threaded screw with  $d = 8$  mm

$EA_S = \frac{E \cdot \pi \cdot d_1^2}{4}$  axial stiffness of one screw in N

$d_1$  = inner thread diameter of the screw in mm

The axial capacity of the screw shall fulfill

$$\frac{F_{ax,d}}{F_{ax,Rd}} \leq 1$$


where

$$F_{ax,Rd} = \min \begin{cases} f_{ax,d} \cdot d \cdot l_{ef} \\ f_{tens,d} \end{cases}$$

$f_{ax,d}$  = design value of the withdrawal parameter of the threaded part of the screw in N/mm<sup>2</sup>

$l_{ef}$  = effective penetration length with 50 % of the threaded part length of the screw in the timber member in mm

$f_{tens,d}$  = design tensile strength of the screw in N

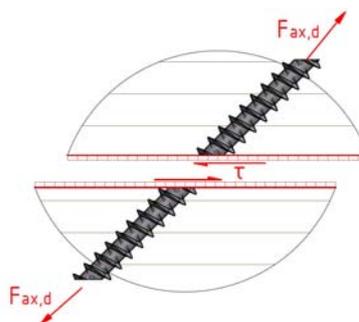

**Schmid screws RAPID®, STARDRIVE and SP**



Characteristic data of the screws

Annex 6

of European Technical Assessment  
 ETA-12/0373 of 03.11.2017

### A.7.1 General

For screws with  $d \geq 8$  mm the minimum width/thickness for structural members shall be in accordance with Table A7.1. Minimum thickness for structural members is  $t = 24$  mm for screws with  $d < 8$  mm.

**Table A7.1 Minimum width/thickness for structural members**

Screw diameter		8	10	12
Minimum thickness $t$ for structural members	mm	30	40	80

### A.7.2 Laterally and/or axially loaded screws

For Schmid screws RAPID®, STARDRIVE and SP in predrilled and non-predrilled holes, the minimum spacing, end and edge distances shall be specified according to EN 1995-1-1. Here, the outer thread diameter  $d$  shall be considered.

For screws in non-predrilled holes, the minimum distances for loaded and unloaded ends shall be  $15 d$  for screws with outer thread diameter  $d \geq 8$  mm and timber thickness  $t < 5 d$ .

Minimum distances from the unloaded edge perpendicular to the grain may be reduced to  $3 d$  also for timber thickness  $t < 5 d$ , if the spacing parallel to the grain and the end distance is at least  $25 d$ .

### A.7.3 Only axially loaded screws

For Schmid screws RAPID®, STARDRIVE and SP with  $d \leq 8$  mm or provided with a half cut or drill point which are loaded only axially, the following minimum spacing, end and edge distances apply alternatively for a minimum timber thickness of  $t = 12 d$  in non-predrilled holes:

Spacing  $a_1$  in a plane parallel to the grain:  $a_1 = 5 d$

Spacing  $a_2$  perpendicular to a plane parallel to the grain:  $a_2 = 5 d$

End distance of the centre of gravity of the threaded part in the timber member:  $a_{1,c} = 5 d$

Edge distance of the centre of gravity of the threaded part in the timber member:  $a_{2,c} = 4 d$

Spacing  $a_2$  can be reduced till  $2.5 d$  ( $3 d$ ) if the product of spacing  $a_1$  times  $a_2 = 25 d^2$  ( $21 d^2$ ) can be kept for every screw.

Schmid screws RAPID®, STARDRIVE and SP



Spacing, end and edge distances of the screws and minimum thickness of the wood based material

Annex 7

of European Technical Assessment  
 ETA-12/0373 of 03.11.2017

### A.8.1 Fastening of thermal insulation material (on top of rafters and facades)

RAPID®, STARDRIVE and SP with an outer thread diameter of at least 6 mm and lengths between 120 mm and 600 mm may be used for fixing of thermal insulation material on rafters or on wood-based members in vertical facades. Screw head “E” and “L” according to Annex 1 are excluded from fixing wood-based panels on rafters with thermal insulation material as interlayer.

The angle between grain direction and screw axis shall be  $30^\circ \leq \alpha \leq 90^\circ$ .

The thickness of the **thermal insulation material** is max. 400 mm. The thermal insulation material shall be applicable as insulation on top of rafters according to national provisions that apply at the installation site.

The **battens** are made from solid timber strength class C24 according to EN 338 and EN 14081-1. The minimum thickness and width of the battens is:

**Table A8.1 Minimum thickness and width of the battens**

Screw diameter d in mm	$b_{min}$	$t_{min}$
	mm	mm
≤ 8	50	30
10	60	40
12	80	50

Instead of battens the following **wood-based panels** may be used to cover the thermal insulation material if they are suitable for that use:

- Plywood according to EN 636 and EN 13986,
- Oriented Strand Board, OSB according to EN 300 and EN 13986,
- Particleboard according to EN 312 and EN 13986
- Fibreboards according to EN 622-2, EN 622-3 and EN 13986.

The minimum thickness of the wood-based panels shall be 22 mm.

The word batten in the following includes the meaning of the above mentioned wood-based panels.

The **substructure** is made from solid timber strength class C24 according to EN 338 and EN 14081-1, cross laminated timber according to European Technical Assessments or laminated veneer lumber according to EN 14374. The minimum width is  $b_{min} = 60$  mm, for screws with an outer thread diameter of 12 mm the minimum width  $b_{min} = 80$  mm.

The spacing between screws  $e_s$  shall be not more than 1.75 m.

Schmid screws RAPID®, STARDRIVE and SP



Fastening of thermal insulation material

Annex 8

of European Technical Assessment  
 ETA-12/0373 of 03.11.2017


electronic copy



**Version 1**


roof, facade  
 $\beta = 0^\circ - 90^\circ$

A: acc. to static  
 B:  $\leq 50\text{mm}$

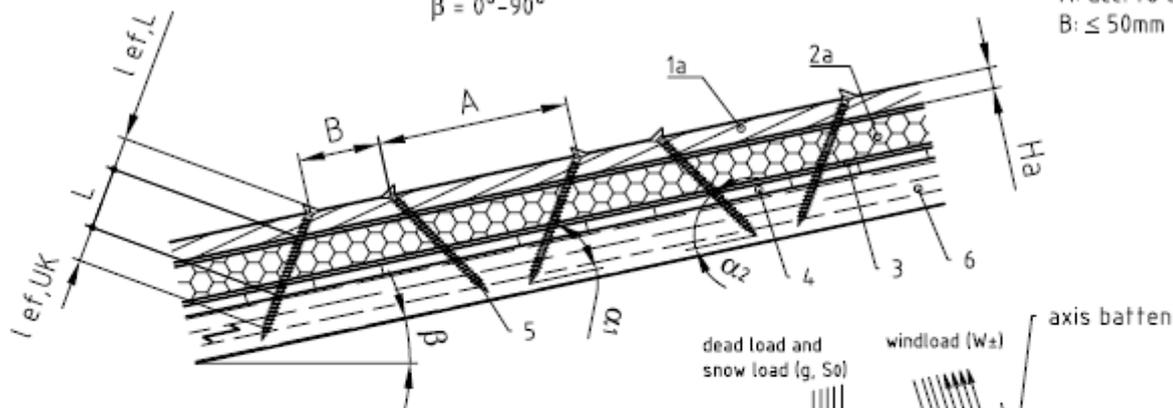


$\alpha, \alpha_1, \alpha_2$  = angle of  
 the self-tapping screws  
 over the grain direction  
 of the rafter

$30^\circ \leq \alpha, \alpha_1, \alpha_2 \leq 90^\circ$

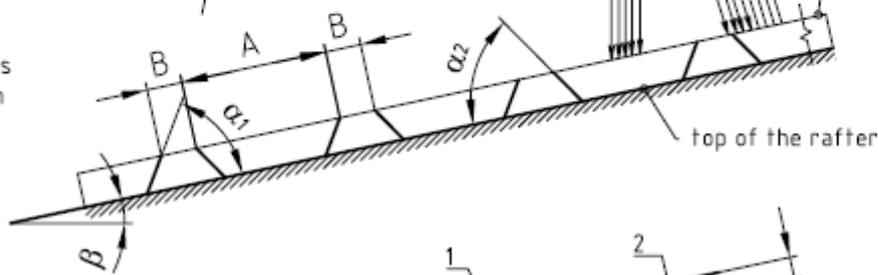

**Version 2**

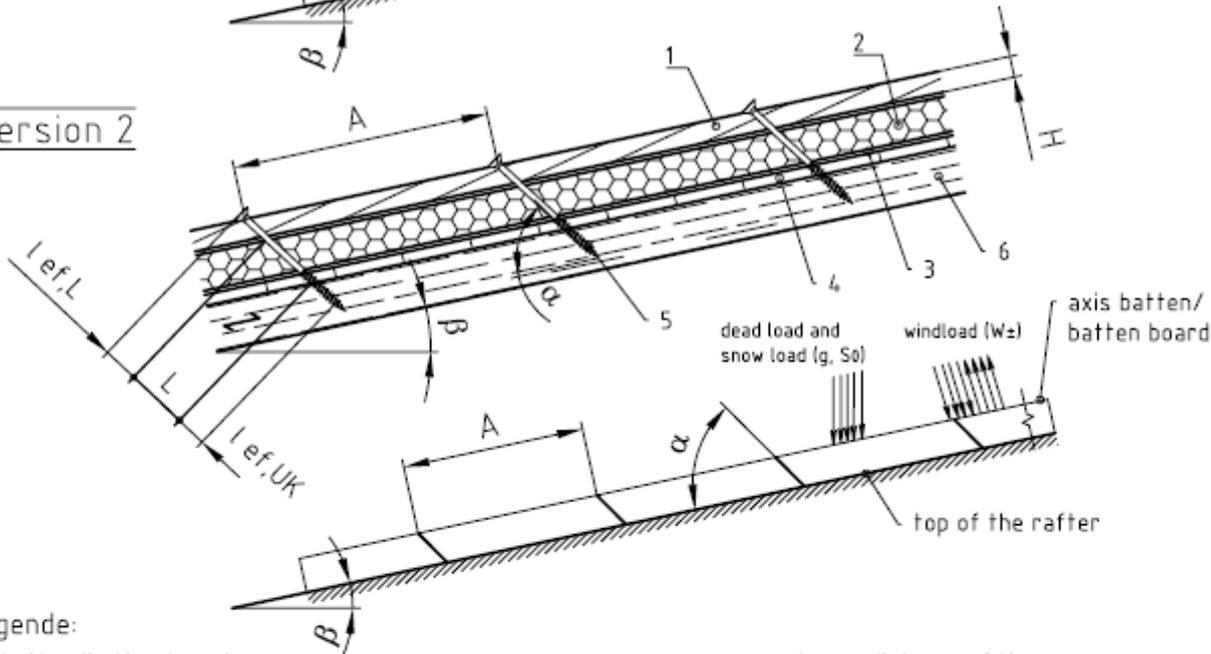

Legende:

- 1 batten/batten board
- 1a batten
- 2 heat insulation (fill 300mm), pressure resistant (min. 0,05 N/mm<sup>2</sup>)
- 2a heat insulation (fill 400mm), pressure resistant
- 3 vapour barrier
- 4 roof boards
- 5 self-tapping screws
- 6 rafter

- A distance of the screws
- H thickness batten/batten board
- Ha thickness batten
- l<sub>ef,L</sub> penetration length in the batten/batten board
- l<sub>ef,UK</sub> penetration length in the rafter

Schmid screws RAPID®, STARDRIVE and SP



Annex 8

of European Technical Assessment  
 ETA-12/0373 of 03.11.2017

Fastening of thermal insulation material

### A.8.2 Alternately inclined screws (only screws with full thread)

The screws are predominantly loaded in withdrawal or compression, respectively. Only systems with battens are allowed.

#### Design

For design of thermal insulation systems in terms of number and spacing of the screws the following characteristic values of tensile or compressive load bearing capacity may be taken into account:

$$R_{ax,k} = \min \begin{cases} f_{ax,k,\alpha} \cdot d \cdot l_{ef,L} \\ f_{ax,k,\alpha} \cdot d \cdot l_{ef,UK} \end{cases} \quad \text{in N}$$

where:

- $f_{ax,k,\alpha}$  = characteristic value of the axial withdrawal parameter of the threaded part of the screw in the batten,  $f_{ax,k,\alpha}$  does not apply for wood-based panels
- $\alpha$  = angle between screw axis and grain direction of batten or substructure
- $d$  = outer thread diameter of the screw in mm
- $l_{ef,L}$  = penetration length of the threaded part of the screw in the batten in mm; the screw head length  $k$  may be taken into account for tension load (not for compressive loading)
- $l_{ef,UK}$  = penetration length of the threaded part of the screw in the substructure in mm;  $\geq 60$  mm

For compressive loading the design compressive load bearing capacity shall not exceed the buckling capacity of the screws  $\chi \cdot N_{pl,d}$  according to A.6.5.

### A.8.3 Parallel inclined screws

The screws are predominantly loaded in tension whereas corresponding thermal insulation material is loaded in compression. The minimum compression stress of the thermal insulation material at 10 % deformation, measured according to EN 826, shall be  $\sigma_{(10\%)} \geq 0.05$  N/mm<sup>2</sup>. Hereby systems with battens or wood-based panels may be used.

#### Design

For design of thermal insulation systems in terms of number and spacing of the screws the following characteristic withdrawal parameter may be taken into account:

Schmid screws RAPID®, STARDRIVE and SP



Annex 8

of European Technical Assessment  
 ETA-12/0373 of 03.11.2017

Fastening of thermal insulation material

$$R_{ax,k} = \min \left\{ \begin{array}{l} f_{ax,k,\alpha} \cdot d \cdot l_{ef,UK} \cdot k_1 \cdot k_2 \\ \max \left\{ \begin{array}{l} f_{head,k} \cdot d_k^2 \\ f_{ax,k,\alpha} \cdot l_{ef,L} \cdot d \end{array} \right. \end{array} \right. \quad \text{in N}$$

where:

$f_{ax,k,\alpha}$  = characteristic value of the axial withdrawal parameter of the threaded part of the screw in the batten,  $f_{ax,k,\alpha}$  does not apply for wood-based panels

$f_{head,k}$  = characteristic head pull-through parameter according to Tables A6.1 and A6.2

$$k_1 = \min \left\{ \begin{array}{l} 1 \\ \frac{220}{d_{D\ddot{a}}} \end{array} \right.$$

$$k_2 = \min \left\{ \begin{array}{l} 1 \\ \frac{\sigma_{10\%}}{0.12} \end{array} \right.$$

$d_{D\ddot{a}}$  = thickness of thermal insulation material in mm

$\sigma_{10\%}$  = compressive stress of thermal insulation material at 10 % strain in N/mm<sup>2</sup>

Schmid screws RAPID®, STARDRIVE and SP




Annex 8

of European Technical Assessment  
 ETA-12/0373 of 03.11.2017


Fastening of thermal insulation material

### A.9.1 Connections between timber and a steel member

The screws may be used in connections between timber and a steel member, e.g. wind bracing or tensile splice in solid timber, glued laminated timber and glued solid timber of softwood. The screws are driven into the timber member under an angle between the screw axis and the grain direction of  $30^\circ \leq \alpha \leq 90^\circ$ .

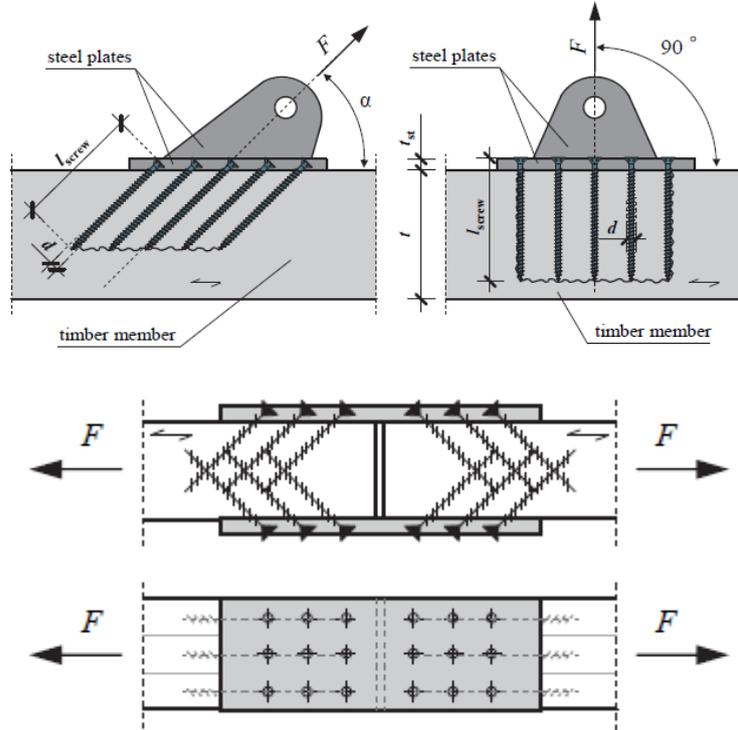

Sufficient contact of the screw head must be ensured. This is fulfilled for countersunk heads with countersunk washer as well as heads with a flat bottom side (e.g. pan head, washer head, SuperSenkFix,...) for 90° drillings. Alternatively, countersunk head screws may be used in 90° countersunk drillings where

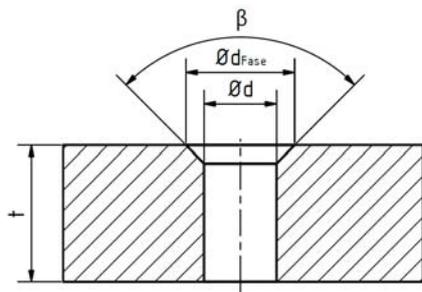

$$d_{Fase} = d \cdot 1.5 \text{ in mm}$$

$d$  = diameter of the drilling in mm

$d_{Fase}$  = diameter of the chamfer in mm

The diameter  $d$  of the drilling must be greater than the diameter of the screw.

Schmid screws RAPID®, STARDRIVE and SP




Annex 9

of European Technical Assessment  
 ETA-12/0373 of 03.11.2017

Connections between timber and steel

For countersunk head screws with a diameter  $8 \text{ mm} \leq d \leq 12 \text{ mm}$  used in countersunk drillings under an angle  $30^\circ \leq \alpha < 90^\circ$  the diameter  $d_k$  must be greater than the head diameter. Hereby, the following minimum thickness  $s$  of the steel member underneath the screw head is required:

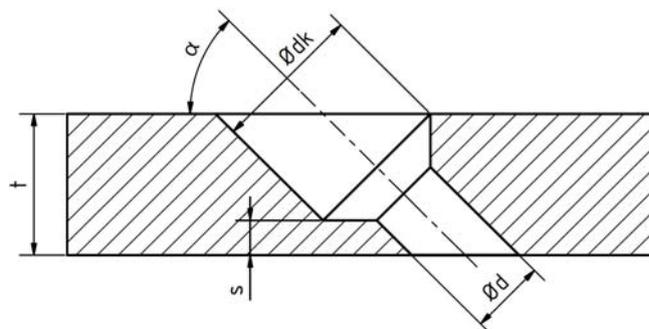

$\alpha \geq 45^\circ$        $s \geq 3 \text{ mm}$   
 $30^\circ \leq \alpha \leq 45^\circ$        $s \geq 2 \text{ mm}$

Design for equally tightened screws (torque controlled) in a steel member under an angle  $30^\circ \leq \alpha \leq 45^\circ$  may follow:

$$F_\alpha = F_{ax,\alpha} \cdot (\cos \alpha + \mu \cdot \sin \alpha)$$

where:

- $F_\alpha$  = load bearing capacity of inclined screws in N
- $F_{ax,\alpha}$  = axial load bearing capacity of the screw in N with  $n_{ef} = 0.9 \cdot n$
- $\alpha$  = angle between screw axis and grain direction
- $\mu$  = friction coefficient between steel member and timber surface,  $\mu = 0.3$

For symmetrically arranged steel members on both sides of the timber member, tension in transverse direction must be verified if the overlapping of the crossed screws in the middle of the axis is lower than  $4 d$ .

Schmid screws RAPID®, STARDRIVE and SP



Annex 9

of European Technical Assessment  
 ETA-12/0373 of 03.11.2017

Connections between timber and steel

European Assessment Document EAD 130118-00-0603 “Screws for use in timber constructions”

EN 300 (07.2006), Oriented Strand Boards (OSB) – Definitions, classification and specifications

EN 312 (09.2010), Particleboards – Specifications

EN 338 (04.2016), Structural timber – Strength classes

EN 622-2 (04.2004) +AC (12.2005), Fibreboards – Specifications – Part 2: Requirements for hardboards

EN 622-3 (04.2004), Fibreboards – Specifications – Part 3: Requirements for medium boards

EN 634-1 (03.1995), Cement-bonded particleboards – Specifications – Part 1: General requirements

EN 636 (03.2015), Plywood – Specifications

EN 826 (03.2013), Thermal insulating products for building applications – Determination of compression behaviour

EN 1993-1-4 (10.2006) +A1 (06.2015), Eurocode 3 – Design of steel structures – Part 1-4: General rules – Supplementary rules for stainless steels

EN 1995-1-1 (11.2004), +AC (6.2006), +A1 (06.2008), +A2 (05.2014), Eurocode 5 – Design of timber structures – Part 1-1: General – Common rules and rules for buildings

EN 10088-1 (10.2014), Stainless steels – Part 1: List of stainless steels

EN 13353:2008+A1 (05.2011), Solid wood panels (SWP) – Requirements

EN 13986:2004+A1 (04.2015), Wood-based panels for use in construction - Characteristics, evaluation of conformity and marking

EN 14080 (06.2013), Timber structures – Glued laminated timber and glued solid timber – Requirements

EN 14081-1 (02.2016), Timber structures – Strength graded structural timber with rectangular cross section – Part 1: General requirements

EN 14374 (11.2004), Timber structures – Structural laminated veneer lumber – Requirements

**Schmid screws RAPID®, STARDRIVE and SP**



Annex 10

of European Technical Assessment  
 ETA-12/0373 of 03.11.2017

Reference documents